
PQU AL Accessories

31/10/2026

PQ AL Inside Riser (Ref: 82002348)

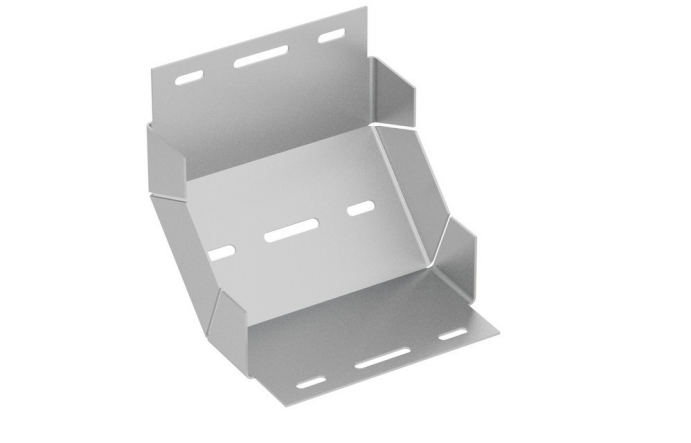

Description

Metal accessory for creating an inside riser in the wiring installation with the Pemsaband® PQU AL tray. Of 30 mm height, Width 100 mm, With AL protection system. It allows descents and height changes to be made with great ease, avoiding damage to the cable routing. Assembly using bolts. Made from Aluminium alloy 1050H24.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Its design allows to make rises and changes of height with ease.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ AL Inside Riser (Ref: 82002348)

Product data

ETIM 10	EC002400	**u**	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**Material**	Aluminum
Protection System	AL	**Impact Strength (J)**	20 J
Finish	1050H24 Aluminium	**Working temperature range (°C)**	-50 / 150 ºC
Flange (mm)	30	**Fire resistance**	A1 No combustible
Width (mm)	100		
R (mm)	200		
kg/u	0,424		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."