
Megaband CPS Accessories

31/10/2026

Megaband CPS 90° Outside Riser (Ref: 82002320)



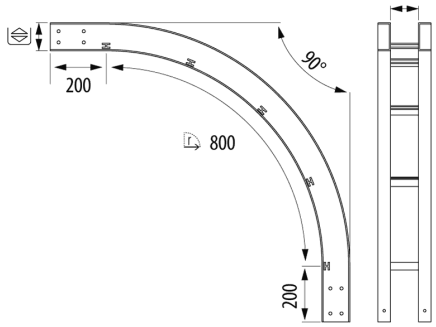

Description

Metal accessory for creating a 90° outside riser in the wiring installation with the Megaband® CPS ladder. Of 100 mm height, Width 300 mm, Angle of 90 °, With AL protection system. It allows descents and height changes to be made with great ease. Radius of curve 200 and 600. Made from Aluminium alloy 6063T6.

Advantages

In accordance with the IEC 61537 and CE standard with respect to directive 2014/35 / EU.

Available in 100 mm height and 200, 300, 400 and 600 mm wide.

Made of Aluminum alloy 6063T6. Excellent corrosion resistance.

Only the Megaband® M8 joint kit or M8 nuts and bolts required

Its design allows to make drops and changes of angle at 90° with great ease

Applications

Suitable for cable conduit installations in the Oil & Gas and Petrochemical Industry, Offshore Platforms, Ports and Maritime Applications in general. Industrial projects in aggressive environments and with high corrosion on the coast and seashore, Power Plants and Renewable Energy.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband CPS 90° Outside Riser (Ref: 82002320)

Product data

ETIM 10	EC001535	**kg/u**	8,740
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	1
Protection System	AL	**Material**	Aluminum
Finish	6063T6 Aluminium	**Impact Strength (J)**	20 J
Flange (mm)	100	**Working temperature range (°C)**	-50 / 150 °C
Width (mm)	300	**Fire resistance**	A1 No combustible
R (mm)	800		
Angle	90		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."