


Metatray outside riser

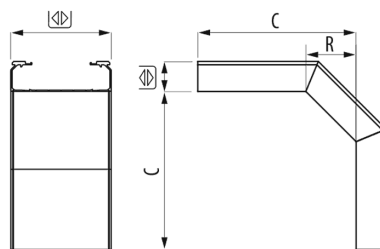

Description

Insulating outside rise of 90° for the management of cable for Metatray® cables trays and trunkings. Of 60 mm height, Width 100 mm. Manufactured in PVC-based Thermoplastic insulating material. Grey RAL 7035 colour for the support, protection and conduction of cables.

Advantages

Insulating material, electrical safety and reduced maintenance costs.

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Protection grade IP4X or IP44 and Impact Grade 20 J (EN 61537) and IK10 (EN50085)

Aenor N mark on product standards EN 61537 and EN 50085. CE compliance with directive 2014/35/EU.

Applications

Suitable for the external rise or drop of cables at a 90° angle in the support, protection and conduction of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that complies with the most demanding standards. Likewise, its application is also ideal in other different sectors: tertiary, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 Colour	Grey RAL 7035	 60, 100	 100, 150, 200, 300, 400, 500, 600	 1	 -20 / 60 °C	 GRADO UL94: V0
 Resistant acc. to	UL568	ETIM 10	EC002400			

Product data

		Ref	kg/u
60	100	82003688	0,806
60	150	82003689	0,985
60	200	82003690	1,211
60	300	82003691	1,751
60	400	82003692	2,111
100	200	82003693	2,521
100	300	82003694	3,181
100	400	82003695	3,921
100	500	82003696	4,701
100	600	82003697	5,631

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

Product applications



