
Megaband Rep Accessories

01/11/2026

Megaband REP 90° Outside Riser (Ref: 82002450)



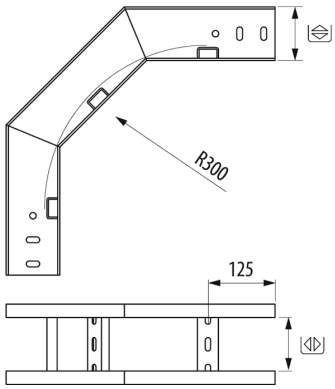

Description

Metal accessory for creating an outside riser in the wiring installation with the Megaband® REP ladder. Of 100 mm height, Width 300 mm. It allows ascents and height changes to be made at a 90° angle with great ease. Assembly using bolts. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Its conical tip allows more contact with the element to which it is screwed.

Applications

Suitable for creating level changes in the distribution of cables on Megaband® REP trays in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, Oil & Gas, power plants, mining and cement installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband Rep Accessories

01/11/2026

Megaband REP 90° Outside Riser (Ref: 82002450)

Product data

ETIM 10	EC001535	**kg/u**	8,620
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	22,326	**u**	1
Protection System	GC	**Material**	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	**Impact Strength (J)**	20 J
Resistance Class	Class 8	**Working temperature range (°C)**	-50 / 150 °C
Flange (mm)	100	**Fire resistance**	A1 No combustible
Width (mm)	300		
R (mm)	300		
Angle	90		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."