


Nemaband 90° Outside Riser (Ref: 82003070)

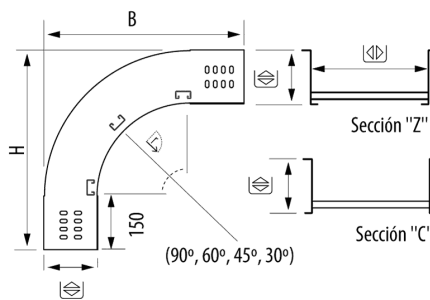

Description

Metal accessory for creating an outside riser in the wiring installation with the Nemaband® ladder. Of 150 mm height, Width 450 mm, Angle of 90°. It allows angles of descent and height changes to be made with great ease avoiding damage to the cable routing. Made from steel with GC Protection system.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Inside and Outside risers availables in 90°, 60°, 45°, 30° angles.

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Adecuado para creación de Cambios de nivel o altura en las gamas de Nemaband® para la canalización, protección y distribución de cables en Instalaciones eléctricas en aplicaciones Industriales y grandes vanos en: Industria Oil&Gas y Petroquímica, Centrales de Energía, Eléctricas, etc. Tratamiento de Agua, Minería y Cementera Plataformas Offshore, Puertos, aplicaciones marítimas. Proyectos industriales en entornos agresivos.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
Protection System	GC	kg/u	6.331
Finish	HDG, Hot Dip Galvanised	u	1
Resistance Class	Class 8	Material	Steel with surface coating
Flange (mm)	150	Impact Strength (J)	20 J
Width (mm)	450	Working temperature range (°C)	-50 / 150 °C
R stat. (mm)	300	Fire resistance	A1 No combustible
Angle	90		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic