
PQ Outside Riser



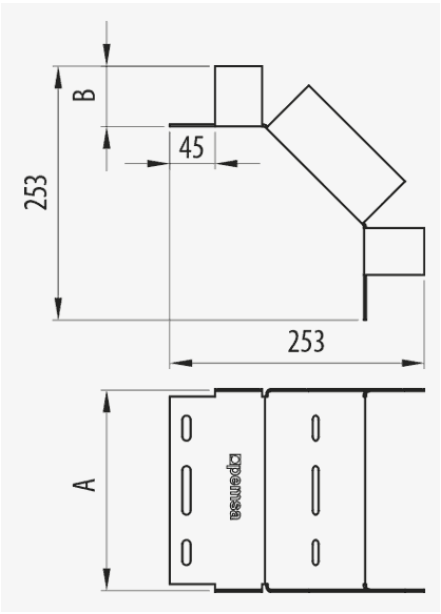

Description

Metal accessory for the creation of a 90° Outside Riser in the wiring installation of the Pemsaband® PQU and PQW tray. It enables a change of height in a vertical direction with great ease and avoids any damage in the routing of the cables. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of level changes and 90° angle drops in Pemsaband® PQU and PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Outside Riser

Main technical characteristics

GC | Class 8 | 15, 30, 50, 60 | 100, 150, 200, 300, 400, 500, 600 | 100 | 1 | Steel with surface coating | 20 J | -50 / 150 °C | A1 No combustible | ETIM 10 EC002400

Product data

		REF	kg/u
15	100	70253010	0,757
15	150	70253015	1,080
15	200	70253020	1,420
15	300	70253030	2,080
30	100	70253110	0,847
30	150	70253115	1,150
30	200	70253120	1,470
30	300	70253130	2,090
30	400	70253140	2,690
30	500	70253150	3,330
30	600	70253160	3,930
50	100	70253210	0,927
50	150	70253215	1,200
50	200	70253220	1,490
50	300	70253230	2,060
50	400	70253240	2,600
50	500	70253250	3,190
50	600	70253260	3,730
60	100	70253310	0,950
60	150	70253315	1,210
60	200	70253320	1,490
60	300	70253330	2,020
60	400	70253340	2,540
60	500	70253350	3,100
60	600	70253360	3,610

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Outside Riser

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."