
PQ Outside Riser (Ref: 70253330)



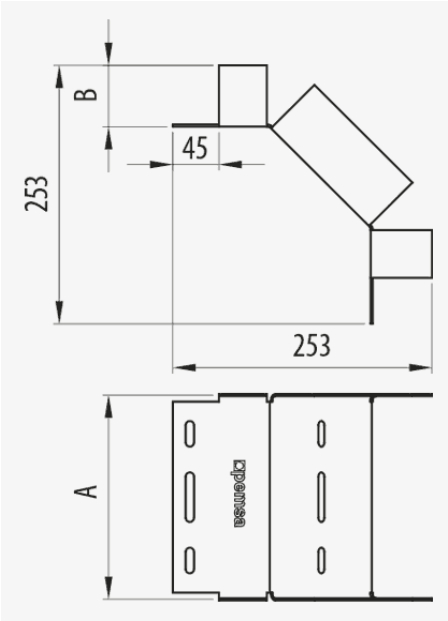

Description

Metal accessory for the creation of a 90° Outside Riser in the wiring installation of the Pemsaband® PQU and PQW tray. Of 60 mm height, Width 300 mm. It enables a change of height in a vertical direction with great ease and avoids any damage in the routing of the cables. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

Applications

Suitable for the creation of level changes and 90° angle drops in Pemsaband® PQU and PQW trays,for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Outside Riser (Ref: 70253330)

Product data

ETIM 10	EC002400	**kg/u**	2,020
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	5,232	**u**	1
Protection System	GC	**Material**	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	**Impact Strength (J)**	20 J
Resistance Class	Class 8	**Working temperature range (°C)**	-50 / 150 °C
Flange (mm)	60	**Fire resistance**	A1 No combustible
Width (mm)	300		
R (mm)	100		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."