


## PQ Outside Riser PQU AL Outside Riser (

1/2

Ref: 82002362 )

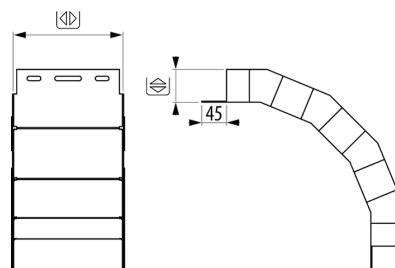

### Description

Metal accessory for creating an outside riser in the wiring installation with the Pemsaband® PQU AL tray. Of 30 mm height, Width 600 mm, With AL protection system. It allows ascents and height changes to be made with great ease, avoiding damage to the cable routing. Assembly using bolts. Made from Aluminium alloy 1050H24.

### Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Its conical tip allows more contact with the element to which it is screwed.

### Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

PQ Outside Riser PQU AL Outside Riser (

2/2

Ref: 82002362 )

| Product data                          |  |                   |  |
|---------------------------------------|--|-------------------|--|
| ETIM 10                               |  | EC002400          |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  |                   |  |
| Protection System                     |  | AL                |  |
| Finish                                |  | 1050H24 Aluminium |  |
| Flange (mm)                           |  | 30                |  |
| Width (mm)                            |  | 600               |  |
| R (mm)                                |  | 200               |  |
| kg/u                                  |  | 2,250             |  |
| u                                     |  | 1                 |  |
| Material                              |  | Aluminum          |  |
| Impact Strength (J)                   |  | 20 J              |  |
| Working temperature range (°C)        |  | -50 / 150 °C      |  |
| Fire resistance                       |  | A1 No combustible |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |