
Cable Tray Accessories

Outside Riser Click



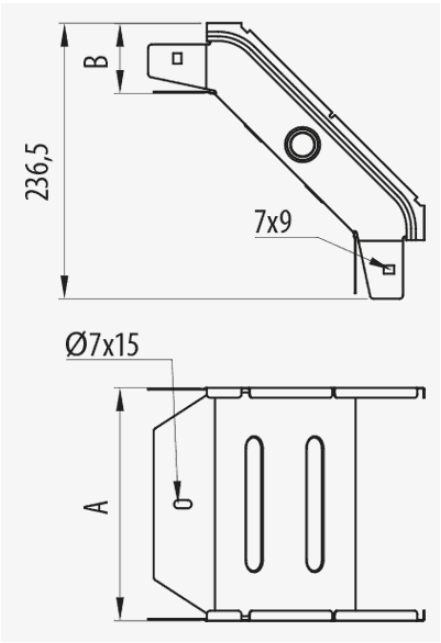

Description

Metal accessory for the creation of a 90° Outside Riser in the wiring installation of Pemsaband® and Inducanal® tray. It enables a change of height in a vertical direction and avoids any damage in the routing of the cables. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers. Patented Universal System that has holes compatible with the connection to other sheet metal tray.

Side flanges have the same profile as the straight section of the trays thus forming a continual view of the installation.

It has pre-formed holes in the sides to allow for the connection of fittings and conduits for the exit of cables.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications

Suitable for the creation of an Inside Riser in the Pemsaband® One perforated and solid ranges for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Outside Riser Click

Main technical characteristics

35, 60, 100 | 100, 150, 200, 300, 60, 400, 500, 600 | 100 | 1 | 20 J | IP44 | -50 / 150 °C

A1 No combustible | ETIM 10 EC002400

Product data

S	Class IEC 61537			REF	kg/u	M
PG	Class 3	35	100	70026110	0,306	Steel with surface coating
PG	Class 3	35	150	70026115	0,405	Steel with surface coating
PG	Class 3	35	200	70026120	0,496	Steel with surface coating
PG	Class 3	35	300	70026130	0,678	Steel with surface coating
PG	Class 3	60	60	70026206	0,175	Steel with surface coating
PG	Class 3	60	100	70026210	0,376	Steel with surface coating
PG	Class 3	60	150	70026215	0,461	Steel with surface coating
PG	Class 3	60	200	70026220	0,544	Steel with surface coating
PG	Class 3	60	300	70026230	0,711	Steel with surface coating
PG	Class 3	60	400	70026240	0,874	Steel with surface coating
PG	Class 3	60	500	70026250	1,050	Steel with surface coating
PG	Class 3	60	600	70026260	1,210	Steel with surface coating
PG	Class 3	100	100	70026410	0,436	Steel with surface coating
PG	Class 3	100	200	70026420	0,567	Steel with surface coating
PG	Class 3	100	300	70026430	0,690	Steel with surface coating
PG	Class 3	100	400	70026440	0,812	Steel with surface coating
PG	Class 3	100	500	70026450	0,936	Steel with surface coating
PG	Class 3	100	600	70026460	1,060	Steel with surface coating
GC	Class 5	35	100	70036110	0,330	Steel with surface coating
GC	Class 5	35	150	70036115	0,436	Steel with surface coating
GC	Class 5	35	200	70036120	0,534	Steel with surface coating
GC	Class 5	35	300	70036130	0,729	Steel with surface coating
GC	Class 5	60	100	70036210	0,404	Steel with surface coating
GC	Class 5	60	150	70036215	0,495	Steel with surface coating
GC	Class 5	60	200	70036220	0,585	Steel with surface coating
GC	Class 5	60	300	70036230	0,782	Steel with surface coating
GC	Class 5	60	400	70036240	0,940	Steel with surface coating
GC	Class 5	60	500	70036250	1,130	Steel with surface coating
GC	Class 5	60	600	70036260	1,300	Steel with surface coating
GC	Class 5	100	100	70036410	0,469	Steel with surface coating
GC	Class 5	100	200	70036420	0,610	Steel with surface coating
GC	Class 5	100	300	70036430	0,742	Steel with surface coating
GC	Class 5	100	400	70036440	0,873	Steel with surface coating
GC	Class 5	100	500	70036450	1,010	Steel with surface coating
GC	Class 5	100	600	70036460	1,140	Steel with surface coating

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Outside Riser Click

Ⓢ	Class IEC 61537			REF	kg/u	Ⓜ
INOX	Class 9C	60	100	70056210	0,329	Stainless steel AISI 304
INOX	Class 9C	60	150	70056215	0,403	Stainless steel AISI 304
INOX	Class 9C	60	200	70056220	0,476	Stainless steel AISI 304
INOX	Class 9C	60	300	70056230	0,622	Stainless steel AISI 304
INOX	Class 9C	60	400	70056240	0,765	Stainless steel AISI 304
INOX	Class 9C	60	500	70056250	0,913	Stainless steel AISI 304
INOX	Class 9C	60	600	70056260	1,060	Stainless steel AISI 304
INOX	Class 9D	60	100	70066210	0,329	Acero inoxidable AISI 316L
INOX	Class 9D	60	150	70066215	0,403	Acero inoxidable AISI 316L
INOX	Class 9D	60	200	70066220	0,476	Acero inoxidable AISI 316L
INOX	Class 9D	60	300	70066230	0,622	Acero inoxidable AISI 316L
INOX	Class 9D	60	400	70066240	0,765	Acero inoxidable AISI 316L
INOX	Class 9D	60	500	70066250	0,913	Acero inoxidable AISI 316L
INOX	Class 9D	60	600	70066260	1,060	Acero inoxidable AISI 316L
GC	Class 5	60	60	82003583	0,181	Steel with surface coating
AZ+	Class 8	60	60	82003821	0,175	Steel with surface coating
AZ+	Class 8	60	100	82003822	0,376	Steel with surface coating
AZ+	Class 8	60	150	82003823	0,461	Steel with surface coating
AZ+	Class 8	60	200	82003824	0,544	Steel with surface coating
AZ+	Class 8	60	300	82003825	0,711	Steel with surface coating
AZ+	Class 8	60	400	82003826	0,874	Steel with surface coating
AZ+	Class 8	60	500	82003827	1,050	Steel with surface coating
AZ+	Class 8	60	600	82003828	1,210	Steel with surface coating
AZ+	Class 8	100	100	82004299	0,436	Steel with surface coating
AZ+	Class 8	100	200	82004301	0,567	Steel with surface coating
AZ+	Class 8	100	300	82004302	0,690	Steel with surface coating
AZ+	Class 8	100	400	82004303	0,812	Steel with surface coating
AZ+	Class 8	100	500	82004304	0,936	Steel with surface coating
AZ+	Class 8	100	600	82004305	1,060	Steel with surface coating
PG	Class 3	35	60	82004428	0,110	Steel with surface coating
AZ+	Class 8	35	60	82004429	0,110	Steel with surface coating
AZ+	Class 8	35	100	82004430	0,310	Steel with surface coating
AZ+	Class 8	35	150	82004431	0,410	Steel with surface coating
AZ+	Class 8	35	200	82004432	0,500	Steel with surface coating
AZ+	Class 8	35	300	82004433	0,680	Steel with surface coating

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Outside Riser Click

Product applications

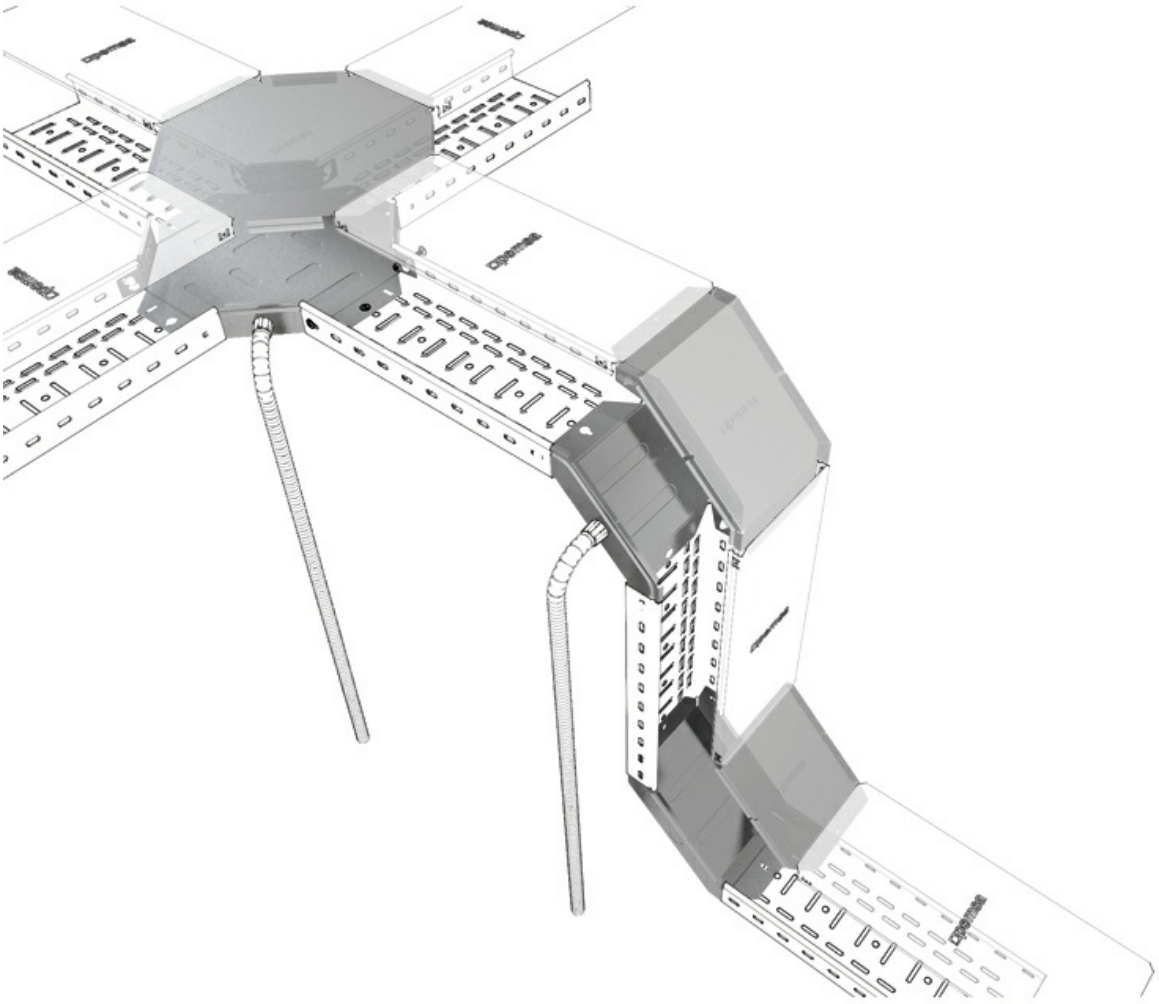


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Outside Riser Click

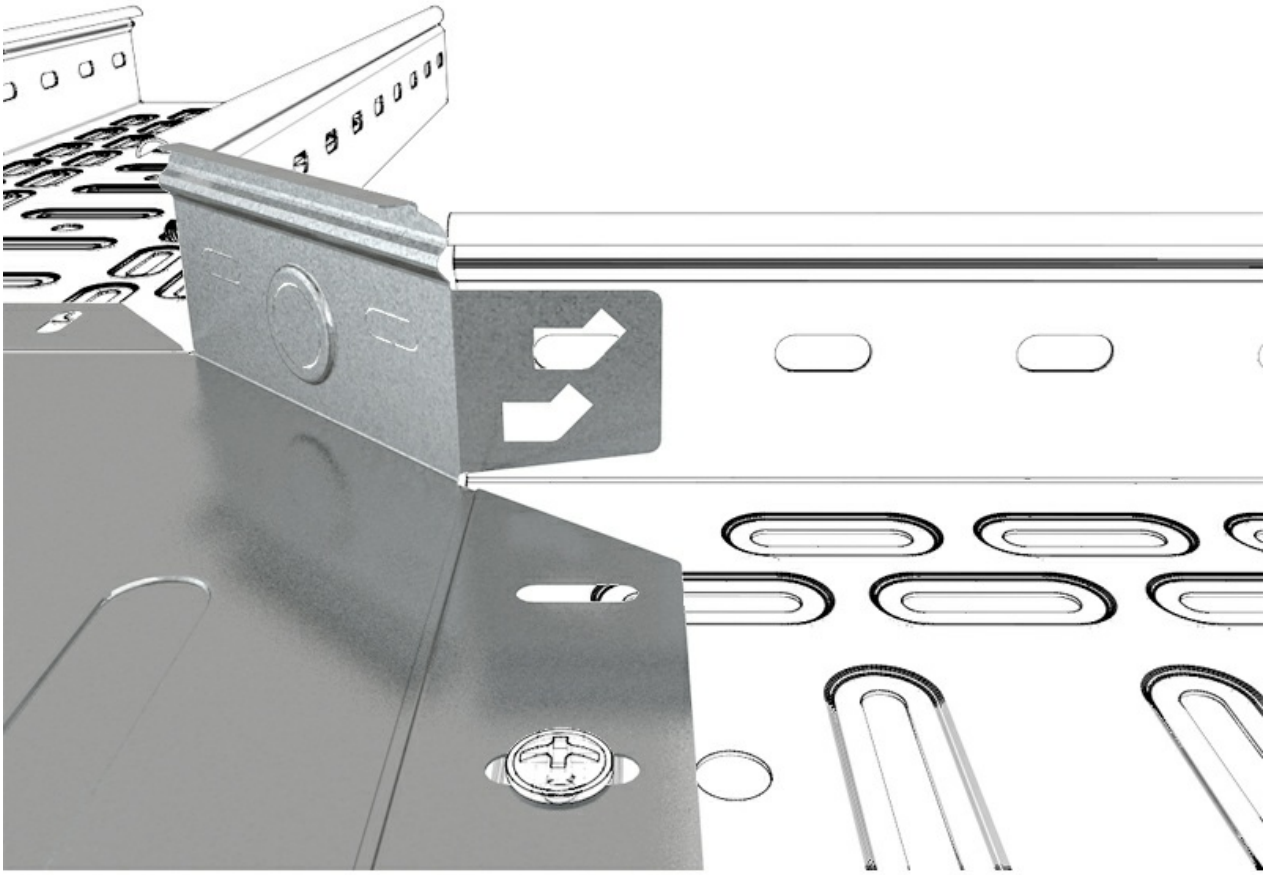

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Outside Riser Click

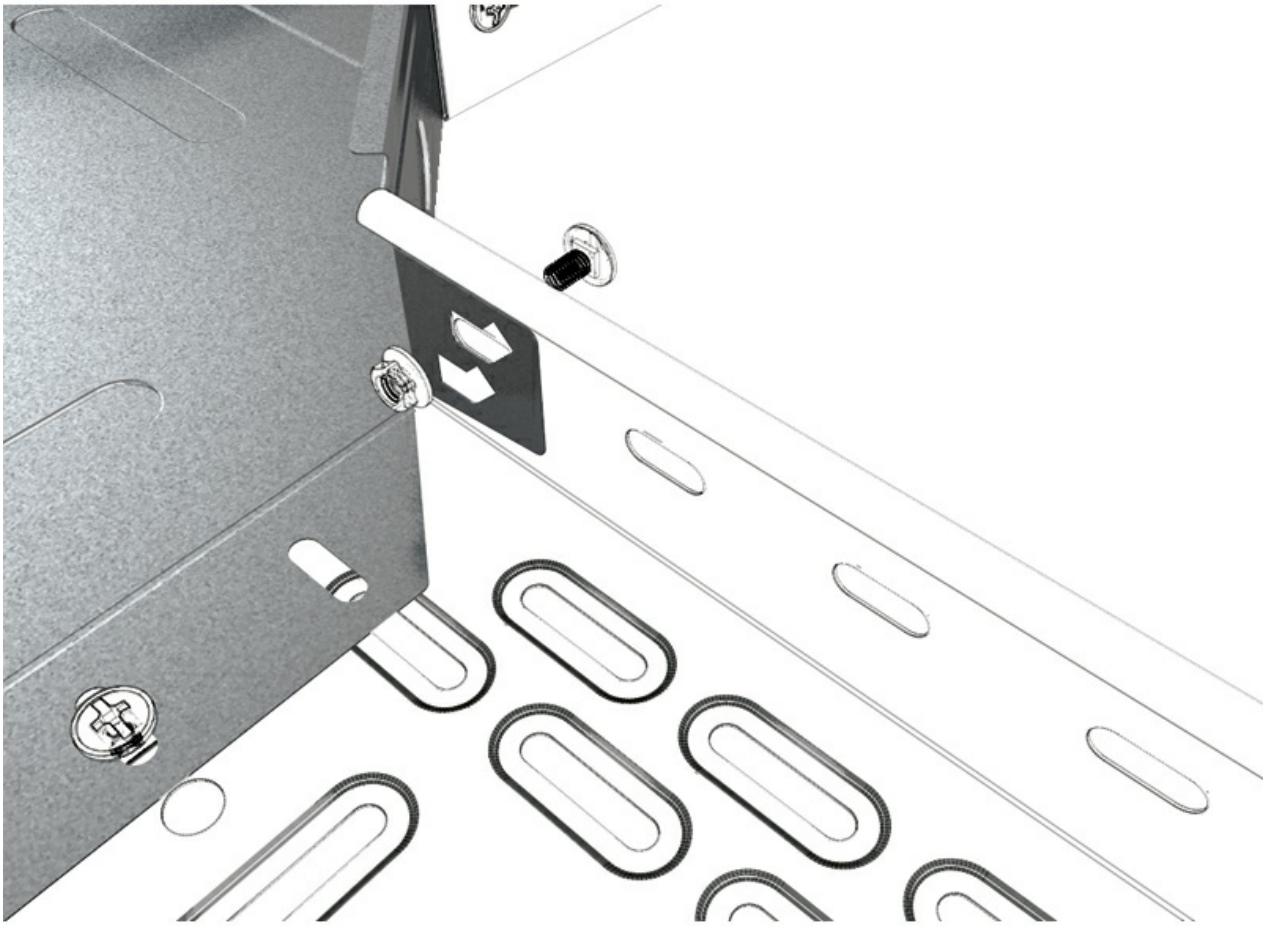

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."