


Outside Riser Click (Ref: 70026430)

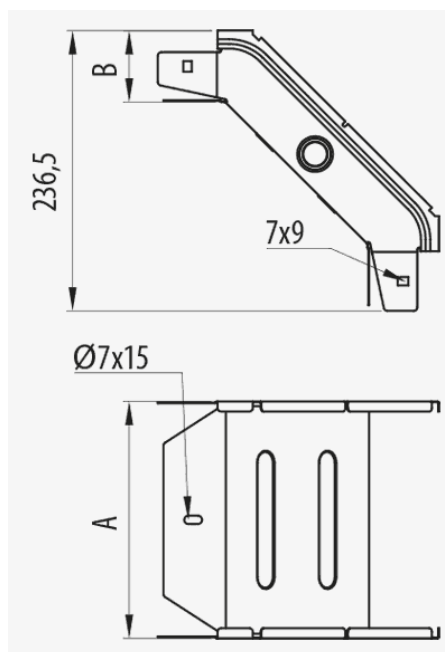

Description

Metal accessory for the creation of a 90° Outside Riser in the wiring installation of Pemsaband® and Inducanal® tray. Of 100 mm height, Width 300 mm, With PG protection system, PG3 finish. It enables a change of height in a vertical direction and avoids any damage in the routing of the cables. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

Side flanges have the same profile as the straight section of the trays thus forming a continual view of the installation.

It has pre-formed holes in the sides to allow for the connection of fittings and conduits for the exit of cables.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers. Patented Universal System that has holes compatible with the connection to other sheet metal tray.

Applications

Suitable for the creation of an Inside Riser in the Pemsaband® One perforated and solid ranges for the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10		EC002400	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		2,23	
Protection System		PG	
Finish		PG3, Pregalvanised	
Resistance Class		Class 3	
Flange (mm)		100	
Width (mm)		300	
R (mm)		100	
kg/u		0,690	
u		1	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
IP		IP44	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System

CU

- Copper electroplated

PG

- Pregalvanised

EZ

- Electrogalvanised

BC

- Electrogalvanised Bichromate

BK8

- High Resistance Coating

GC

- Hot Dip Galvanising

INOX

- Stainless Steel

PT

- Polyester Paint

AL

- Aluminum

LN

- Brass or Nickel-plated brass

Insulating materials

PC+ABS

- Halogen Free Polycarbonate + ABS

PVC

- Polyvinyl Chloride

PP

- Halogen Free Polypropylene

PA6

- Halogen Free Polyamide 6

PA12

- Halogen Free Polyamide 12

PU

- Polyurethane

PE

- Polyethylene

NBR

- NBR rubber

PET

- Thermoplastic Polyester

TPV

- Thermoplastic

Product applications

