


Connector E90 PLUS

1/4

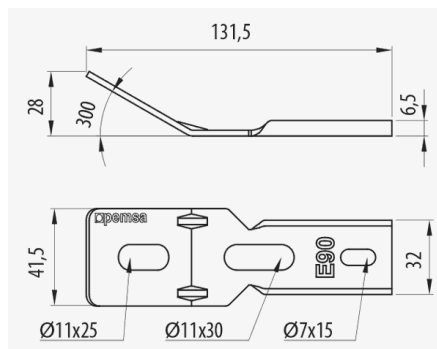

Description

Connector for the PLUS universal omega support that allows the connection of threaded rods to the ceiling, wall or channel for the configuration of an E90 fire-resistant installation. Mounted by fixing M6x30 mm (64030160) or bolts of head DIN 603. Made of steel, GC Protection System.

Advantages

It allows the connection of threaded rods to the range of the universal Omega PLUS supports, both to the ceiling and wall or channel.

Provides greater resistance to installation. Increase the load capacity of the support system.

CE conformity to directive 2014/35 / EU. Fire resistance E90, according to DIN 4102-12.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Applications

Suitable for the creation of fire-resistant installations with E90 approval according to DIN 4102-12 for Rejiband® and Pemsaband® trays in cable conduction in electrical and telecommunications installations that demand high safety requirements in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions



FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

ETIM 10
EC001005

Product data

		Ref	kg/u				
GC	Class 8	62031090	0,100	60	Steel with surface coating	-50 / 150 °C	E90 (90 min. 1000°C)

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass


 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic



Connector E90 SPLUS

Product applications

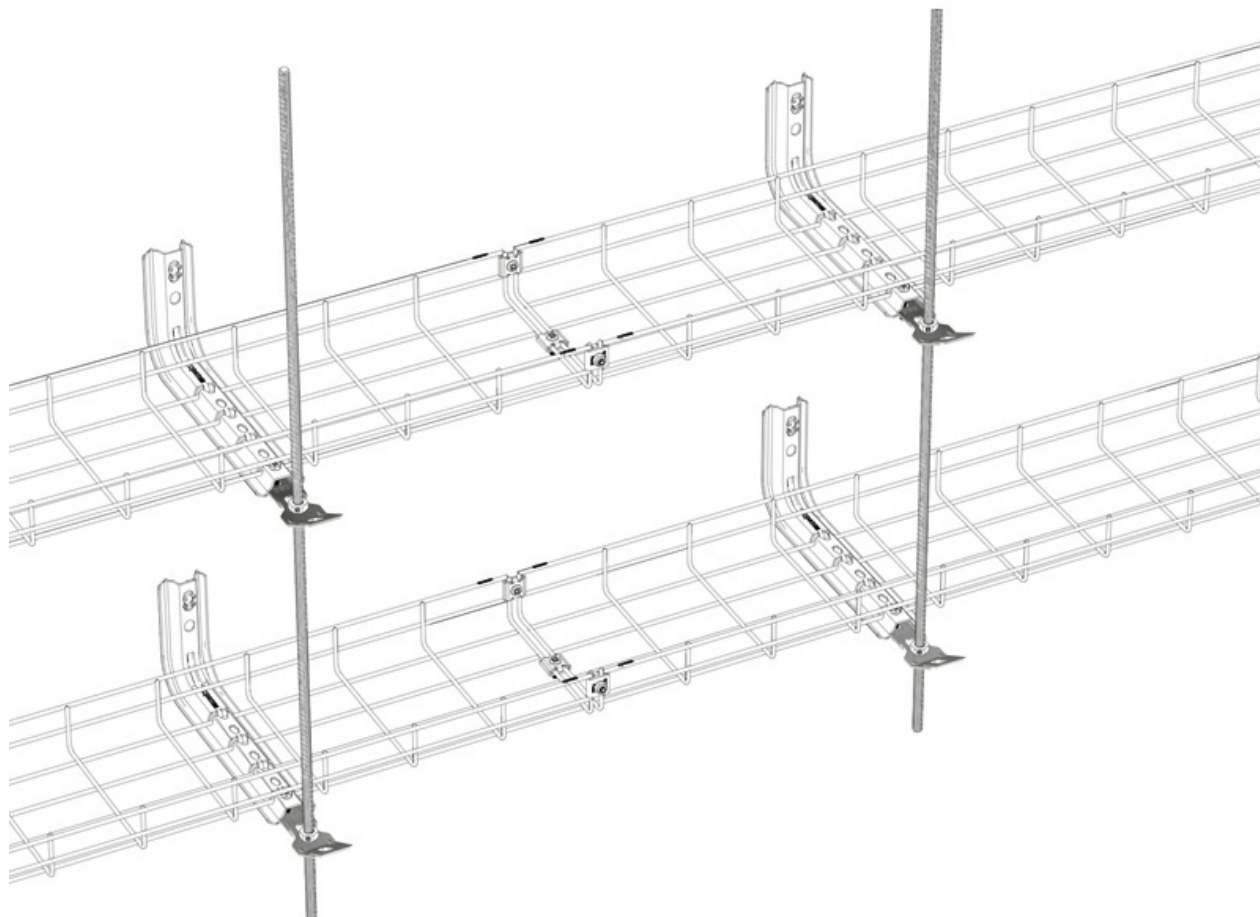

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Connector E90 SPLUS

