


Connector E90 PLUS (Ref: 62031090)

1/4

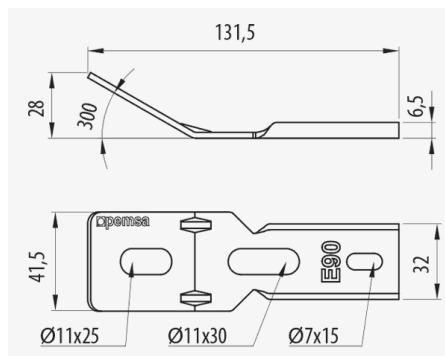

Description

Connector for the PLUS universal omega support that allows the connection of threaded rods to the ceiling, wall or channel for the configuration of an E90 fire-resistant installation. Mounted by fixing M6x30 mm (64030160) or bolts of head DIN 603. Made of steel, GC Protection System.

Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Provides greater resistance to installation. Increase the load capacity of the support system.

CE conformity to directive 2014/35 / EU. Fire resistance E90, according to DIN 4102-12.

It allows the connection of threaded rods to the range of the universal Omega PLUS supports, both to the ceiling and wall or channel.

Applications

Suitable for the creation of fire-resistant installations with E90 approval according to DIN 4102-12 for Rejiband® and Pemsaband® trays in cable conduction in electrical and telecommunications installations that demand high safety requirements in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions



FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		GC	
Finish		Zinc Nickel	
Resistance Class		Class 8	
kg/u		0,100	
u		60	
Material		Steel with surface coating	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		E90 (90 min. 1000°C)	

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane


PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

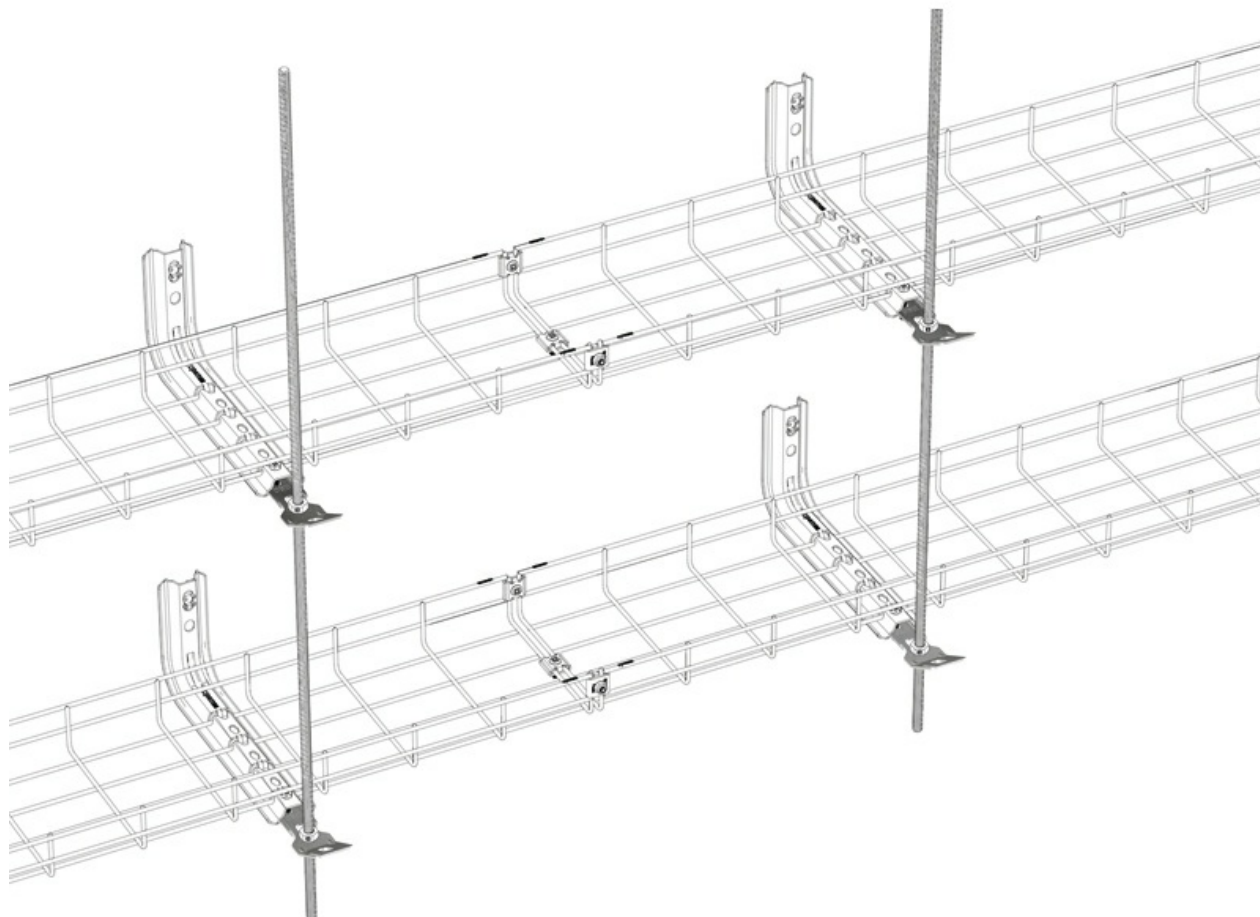

Connector E90 SPLUS (Ref: 62031090)

4/4

