


Connector E90 RPLUS

1/5

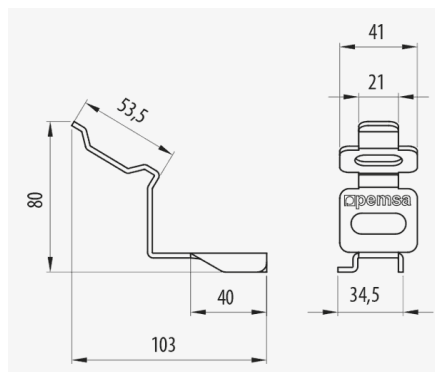

Description

Connector for RPLUS reinforced supports that allows the connection of threaded rods to the ceiling, wall or channel for the configuration of an E90 fire-resistant installation. Mounted by fixing C / DIN 603 M6x20 or hexagonal M8 bolts.

Advantages

It allows the connection of threaded rods to the range of the reinforced RPLUS supports, both to the ceiling and wall or channel.

Provides greater resistance to installation. Increase the load capacity of the support system.

CE conformity to directive 2014/35 / EU. Fire resistance E90, according to DIN 4102-12.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 6.

Applications

Suitable for the creation of fire-resistant installations with E90 approval according to DIN 4102-12 for Rejiband® and Pemsaband® trays in cable conduction in electrical and telecommunications installations that demand high safety requirements in public buildings, infrastructures and civil works, industrial facilities and tertiary sector.

Solutions



FIRE RESISTANCE SOLUTION



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

ETIM 10
EC001005

Product data

		Ref	kg/u				
GC	Class 8	62035001	0,091	15	Steel with surface coating	-50 / 150 °C	E90 (90 min. 1000°C)

 Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

 Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic




www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."




Connector E90 RPLUS

Product applications

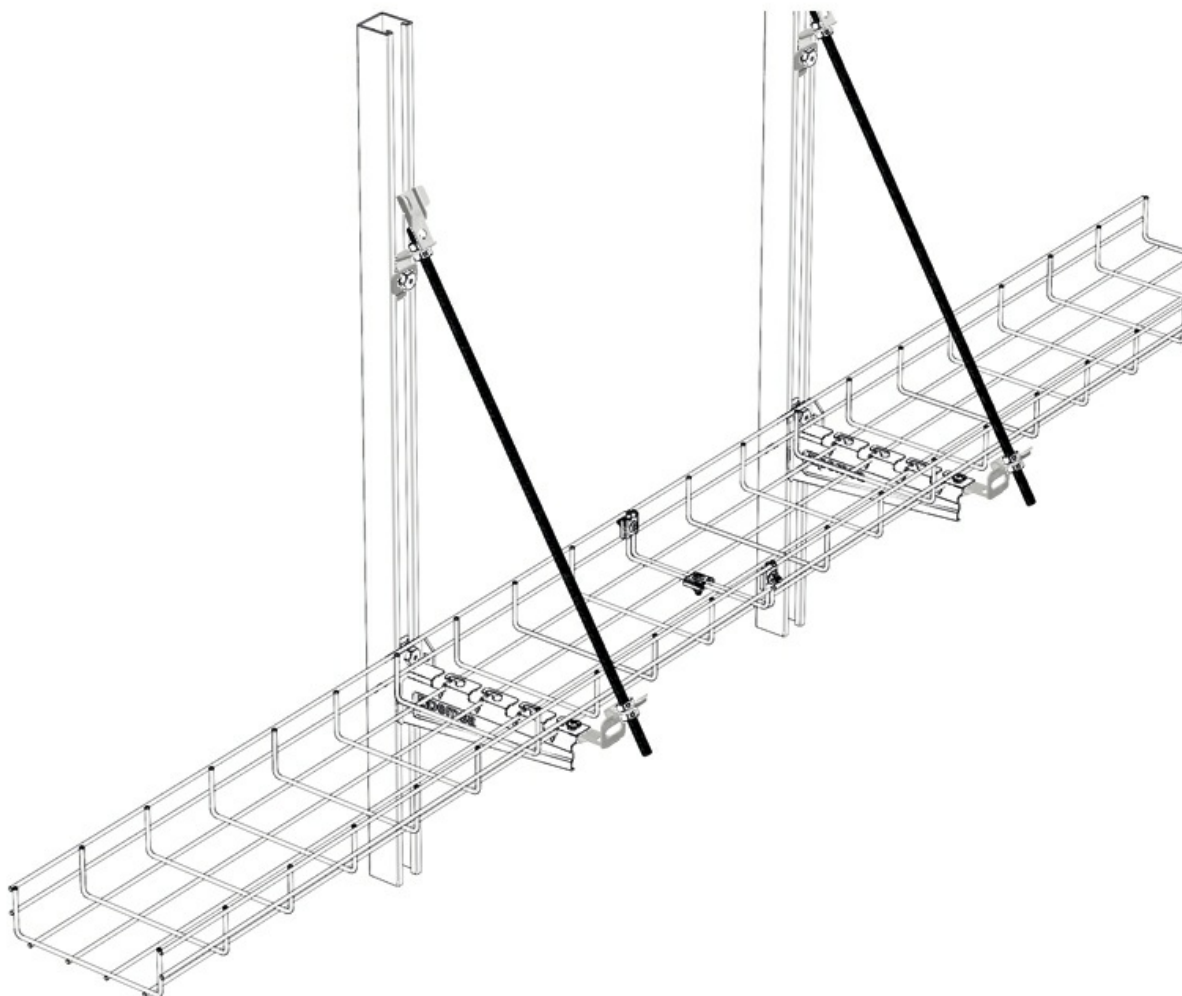

Connector E90 RPLUS

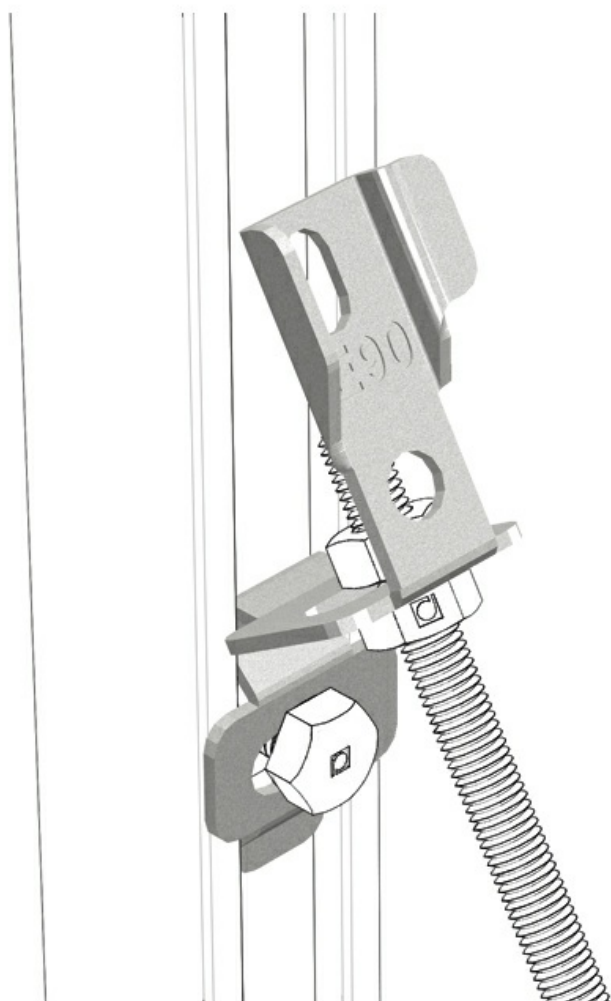

Connector E90 RPLUS

