


**M8 Rod Connector**

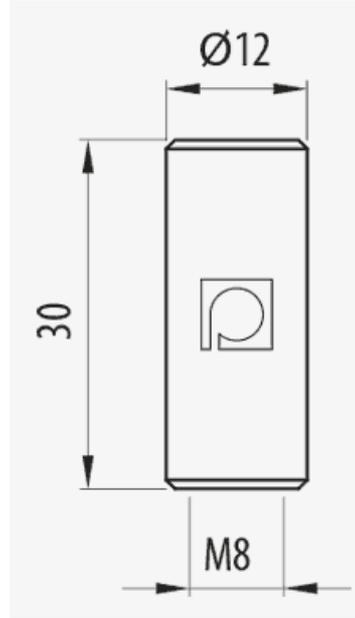

**Description**

Connector for mounting two M8 threaded rods in order to obtain the suitable length for the installation from the ceiling of the electrical installation, 30 mm long and an external diameter of 12 mm, with BC Protection System.

**Advantages**

Joining of sections of 500 mm and 1000 mm M8 rod.

It provides the necessary rigidity so that deformation does not occur.

CE conformity to directive 2014/35 / EU.

BC protection system (standard EN-ISO 2081), gold colour, better corrosion resistance, suitable for indoor installations. Corrosion resistance class 5.

**Applications**

Used for the joining of M8 threaded rods as a support and ceiling mounting for Rejiband® and Pemsaband® trays in the management and distribution of electrical wiring and/or telecommunications.

**Solutions**



**M8 Rod Connector**

**Main technical characteristics**

M 8	kg/u 0.019	50	Steel with surface coating	-50 / 150 °C	A1 No combustible	ETIM EC001003
-----	------------	----	----------------------------	--------------	-------------------	------------------

**Product data**

Ⓢ	Ⓢ	Ref
BC	Class 5	67020067
EZ	Class 2	81000443

**Ⓢ Protection System**

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

**Ⓜ Insulating materials**

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic



**M8 Rod Connector**

Product applications

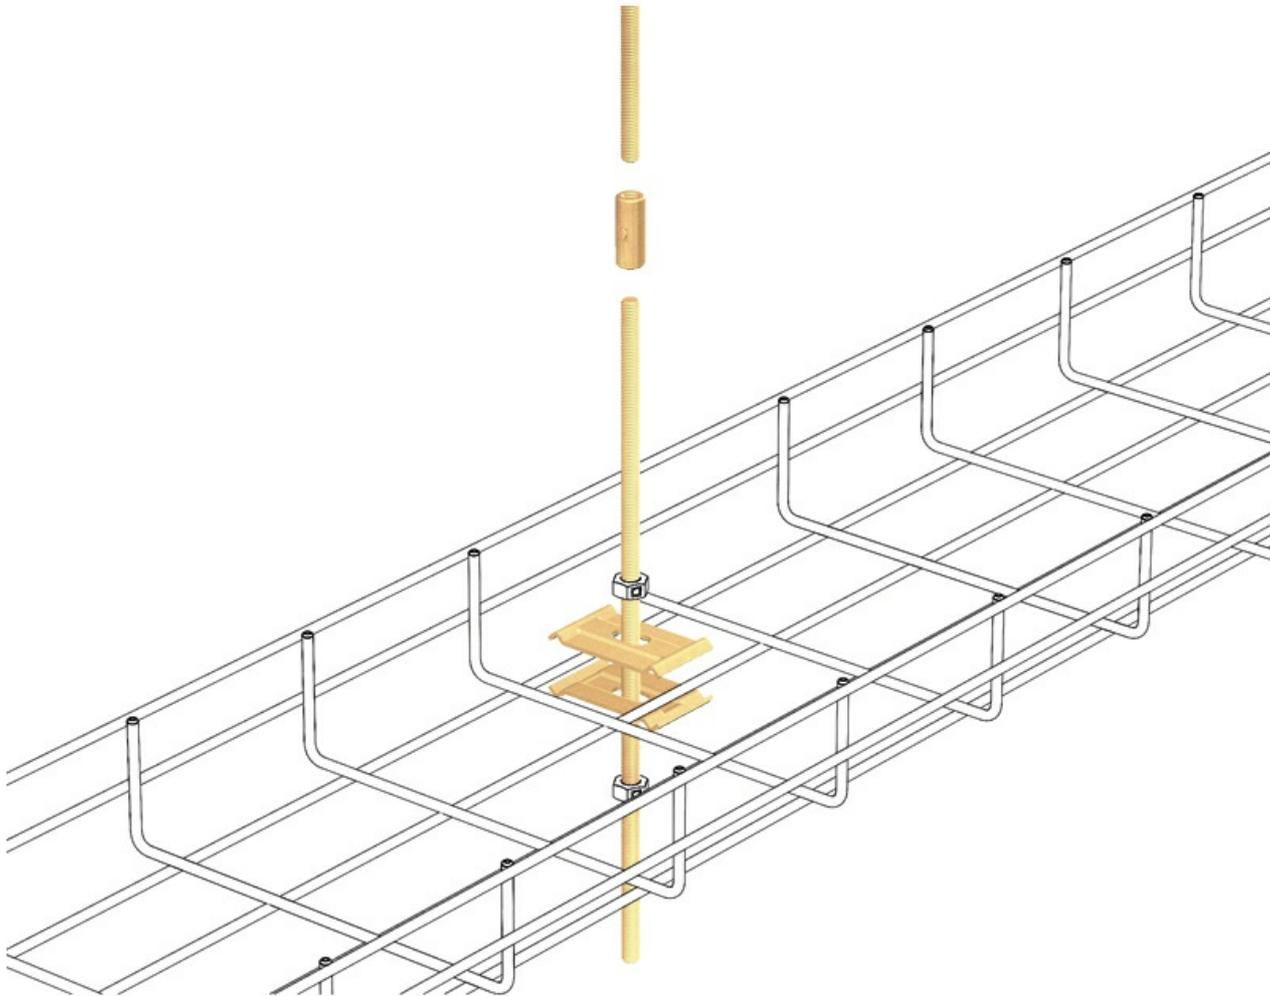

**M8 Rod Connector**

