
# Rod Connector ( Ref: 81000503 )



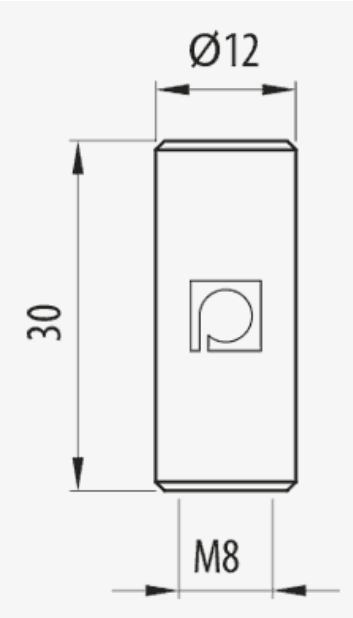


## Description

Connector for mounting two threaded rods. M 6, M 6, With EZ protection system. in order to obtain the suitable length for the installation from the ceiling of the electrical installation, 30 mm long and an external diameter of 12 mm.

## Advantages

BC protection system (standard EN-ISO 2081), gold colour, better corrosion resistance, suitable for indoor installations. Corrosion resistance class 5.

CE conformity to directive 2014/35 / EU.

It provides the necessary rigidity so that deformation does not occur.

Joining of sections of 500 mm and 1000 mm M8 rod.

## Applications

Used for the joining of M8 threaded rods as a support and ceiling mounting for Rejiband® and Pemsaband® trays in the management and distribution of electrical wiring and/or telecommunications.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Rod Connector ( Ref: 81000503 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001005 | **kg/u** | 0,012 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | | **Material** | Steel with surface coating |
| **Protection System** | EZ | **Working temperature range (°C)** | -50 / 150 ºC |
| **Finish** | EZ2, Electrogalvanised | **Fire resistance** | A1 No combustible |
| **Resistance Class** | Class 3 | | |
| **M/PG** | M 6 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester


**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Rod Connector ( Ref: 81000503 )


## Product applications

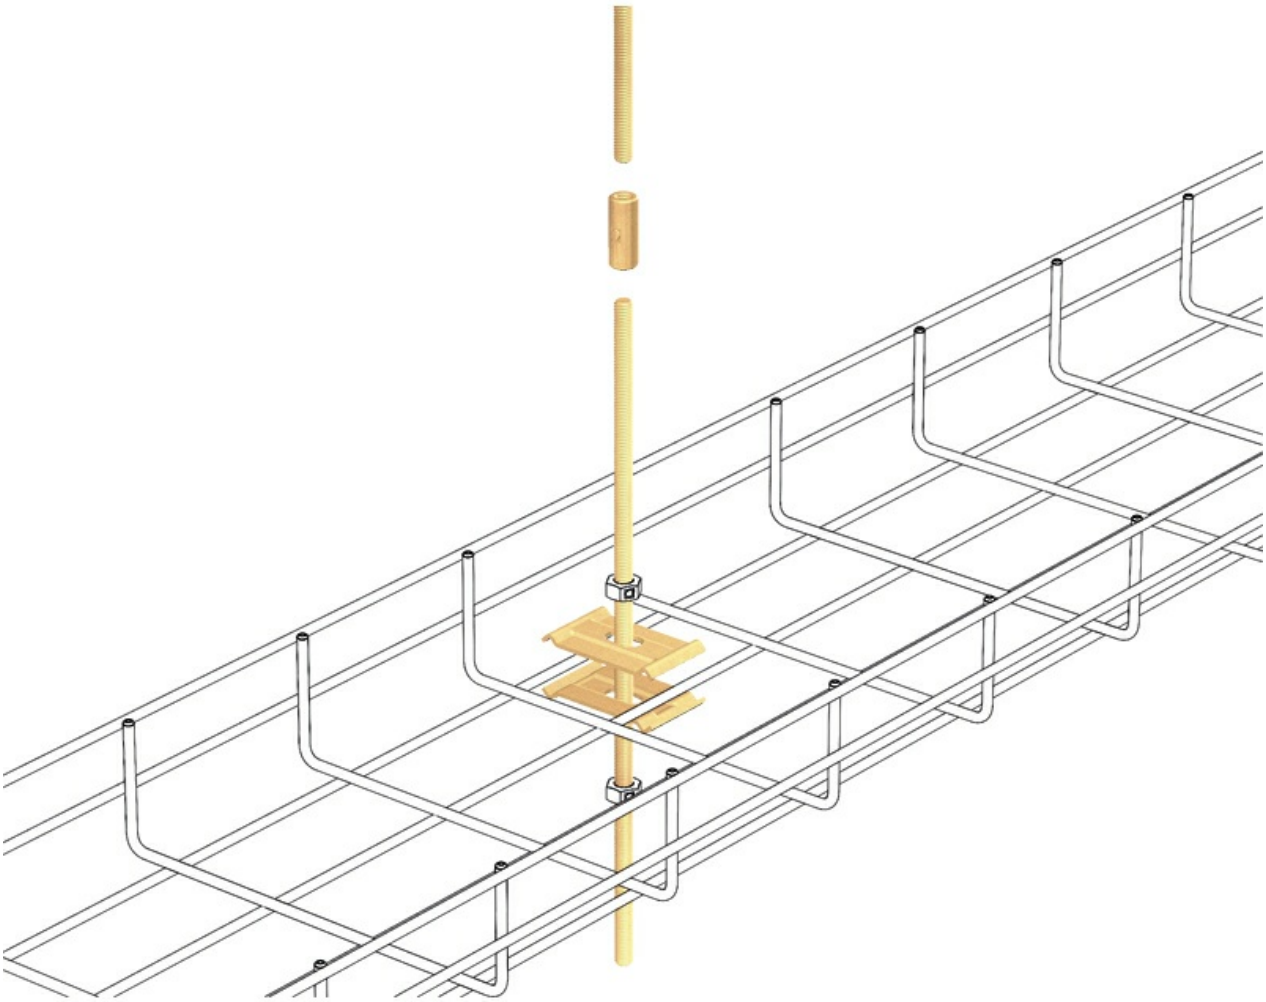



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Rod Connector ( Ref: 81000503 )

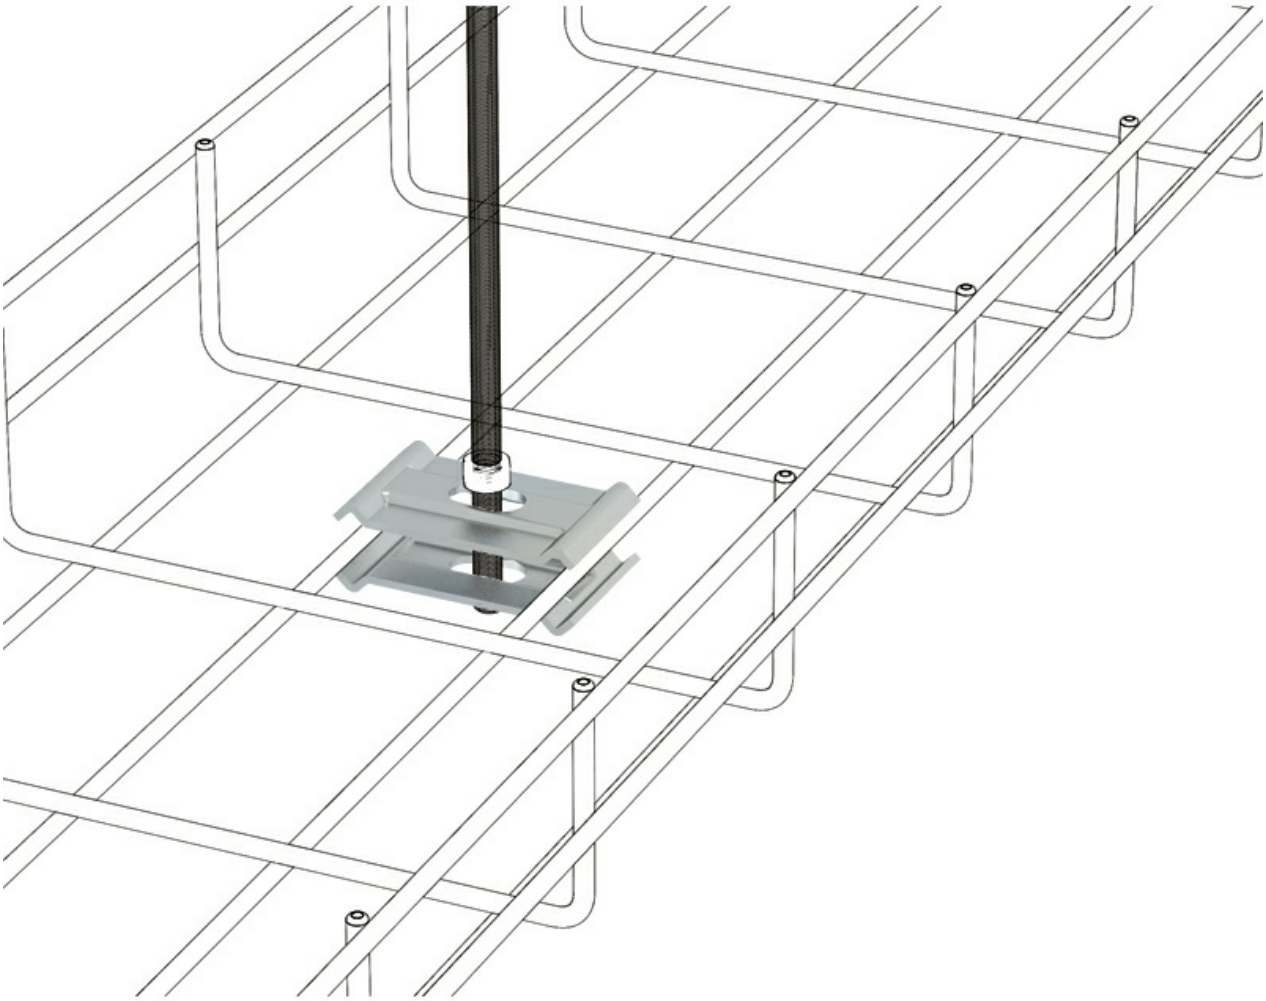

www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."