


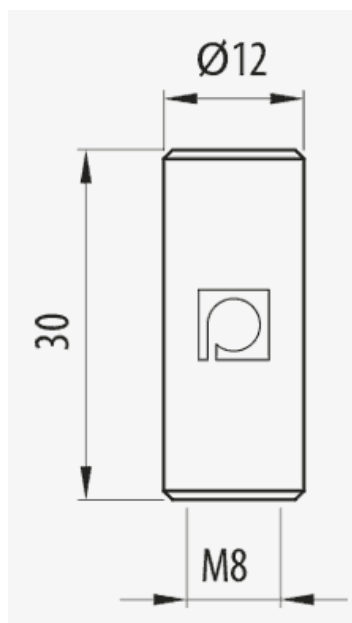

Description

Connector for mounting two threaded rods. M 8, M 8, With BK8 protection system. in order to obtain the suitable length for the installation from the ceiling of the electrical installation, 30 mm long and an external diameter of 12 mm.

Advantages

BC protection system (standard EN-ISO 2081), gold colour, better corrosion resistance, suitable for indoor installations. Corrosion resistance class 5.

CE conformity to directive 2014/35 / EU.

It provides the necessary rigidity so that deformation does not occur.

Joining of sections of 500 mm and 1000 mm M8 rod.

Applications

Used for the joining of M8 threaded rods as a support and ceiling mounting for Rejiband® and Pemsaband® trays in the management and distribution of electrical wiring and/or telecommunications.

Solutions



Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Protection System		BK8	
Finish		Zinc Nickel black	
Resistance Class		Class 8	
M/PG		M 8	
		kg/u	0,021
		Material	Steel with surface coating
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	A1 No combustible

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Product applications

