


Nemaband 30° Bend

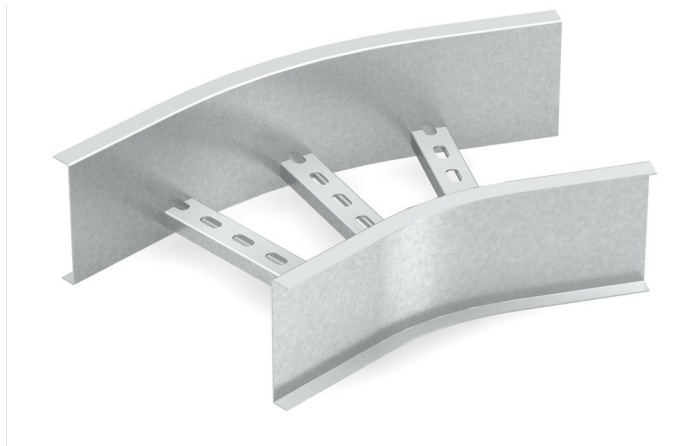

Description

Welded metal accessory for 30° horizontal bends in a Nemaband® ladder installation. Allows the creation of turns or bends in the cable path. Check availability of 900mm radius. Made from steel with GC Protection system.

Advantages

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Uso específico de entornos industriales para instalaciones con requerimiento de grandes vanos.

Cable tray connection using M8 screws or Nemaband® M8 joint kit

CE certified in compliance with the low voltage directive 2014/35 / EU

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Adecuada para la creación de Curvas horizontales de ángulo 30° con Bandejas Nemaband® para la canalización, protección y distribución de cables en Instalaciones eléctricas en aplicaciones Industriales y grandes vanos en: Industria Oil&Gas y Petroquímica, Centrales de Energía, Eléctricas, etc. Tratamiento de Agua, Minería y Cementera Plataformas Offshore, Puertos, aplicaciones marítimas. Proyectos industriales en entornos agresivos.

Solutions



Main technical characteristics							
 GC	 Class 8	 100, 150	 150, 300, 450, 600, 750, 900	30	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM					

Product data				
			Ref	kg/u
100	150	300	82002749	2.821
100	300	300	82002750	3.961
100	450	300	82002751	4.861
100	600	300	82002752	5.751
100	750	300	82002753	6.651
100	900	300	82002754	7.551
150	150	300	82002755	3.661
150	300	300	82002756	4.861
150	450	300	82002757	5.831
150	600	300	82002758	6.791
150	750	300	82002759	7.751
150	900	300	82002760	8.721
100	150	600	82002761	4.041
100	300	600	82002762	5.181
100	450	600	82002763	6.311
100	600	600	82002764	7.441
100	750	600	82002765	9.761
100	900	600	82002766	11.101
150	150	600	82002767	5.151
150	300	600	82002768	6.351
150	450	600	82002769	7.551

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
 www.pemsa-rejiband.com
Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."
     

Nemaband 30° Bend

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

