
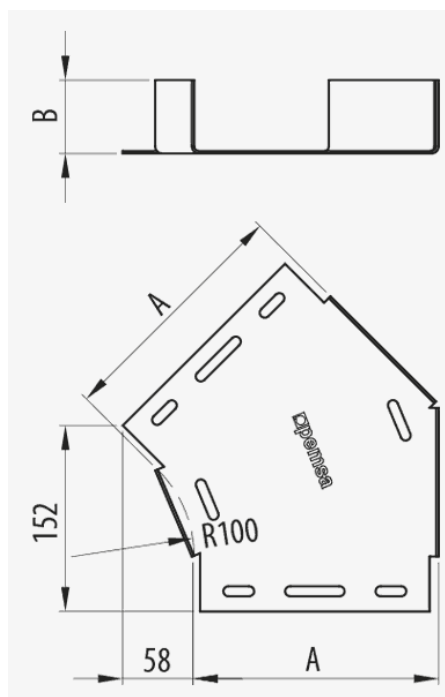


## 45° PQ Bend ( Ref: 70213115 )

1/2

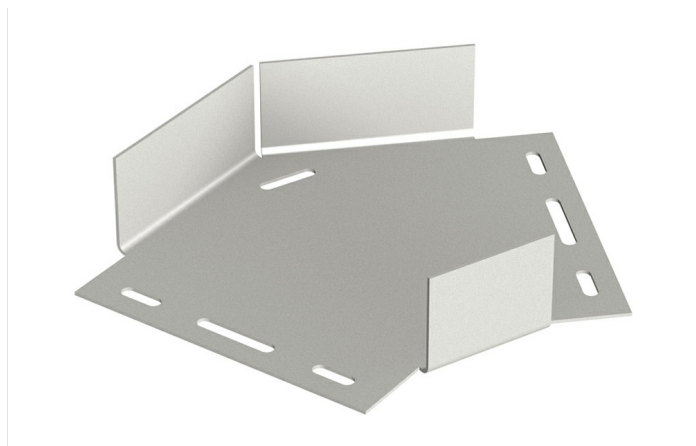

### Description

Metal accessory for the creation of a 45° bend with the Pemsaband® PQU and PQW tray. Of 30 mm height, Width 150 mm, Angle of 45 °. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

### Applications

Suitable for the creation of 45° bends in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



45° PQ Bend ( Ref: 70213115 )

Product data

|                                       |                         |                                |                            |
|---------------------------------------|-------------------------|--------------------------------|----------------------------|
| ETIM 10                               | EC002400                | kg/u                           | 0,681                      |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) | 1,765                   | u                              | 1                          |
| Protection System                     | GC                      | Material                       | Steel with surface coating |
| Finish                                | HDG, Hot Dip Galvanised | Impact Strength (J)            | 20 J                       |
| Resistance Class                      | Class 8                 | Working temperature range (°C) | -50 / 150 °C               |
| Flange (mm)                           | 30                      | Fire resistance                | A1 No combustible          |
| Width (mm)                            | 150                     |                                |                            |
| R (mm)                                | 100                     |                                |                            |
| Angle                                 | 45                      |                                |                            |

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

