


Nemaband 60° Bend

1/3

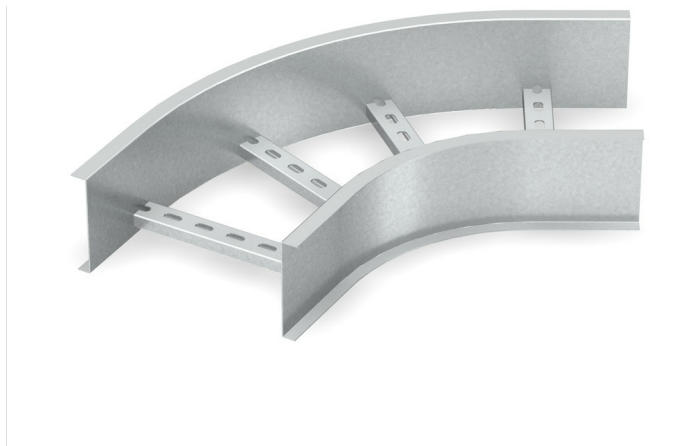

Description

Welded metal accessory for 60° horizontal bends in a Nemaband® ladder installation. Allows the creation of turns or bends in the cable path. Check availability of 900mm radius. Made from steel with GC Protection system.

Advantages

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Specific use in industrial environments for installations requiring large spans.

Cable tray connection using M8 screws or Nemaband® M8 joint kit

CE certified in compliance with the low voltage directive 2014/35 / EU

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating horizontal 60° flat bends with Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics							
GC	Class 8	100, 150	150, 300, 450, 600, 750, 900	60	1	Steel with surface coating	20 J
-50 / 150 °C	A1 No combustible	ETIM 10 EC001535					

Product data				
			Ref	kg/u
100	150	300	82002797	3,700
100	300	300	82002798	5,190
100	450	300	82002799	7,140
100	600	300	82002800	8,630
100	750	300	82002801	11,300
100	900	300	82002802	13,000
150	150	300	82002803	4,350
150	300	300	82002804	6,490
150	450	300	82002805	8,580
150	600	300	82002806	10,200
150	750	300	82002807	13,000
150	900	300	82002808	14,800
100	150	600	82002809	5,560
100	300	600	82002810	7,050
100	450	600	82002811	9,230
100	600	600	82002812	11,000
100	750	600	82002813	12,700
100	900	600	82002814	14,400
150	150	600	82002815	7,260
150	300	600	82002816	8,890
150	450	600	82002817	11,200
150	600	600	82002818	13,100
150	750	600	82002819	14,900
150	900	600	82002820	16,800

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum

Nemaband 60° Bend

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

