


Metatray 90° bend (Ref: 82003724)

1/4

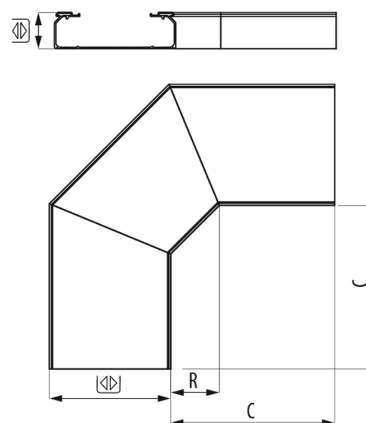

Description

Insulating accessory for the management of cables with 90° for Metatray® cables trays and trunkings. Of 60 mm height, Width 200 mm. Manufactured in PVC-based Thermoplastic insulating material. Grey RAL 7035 colour for the support, protection and conduction of cables.

Advantages

Excellent performance in corrosive environments, weather and exposure to UV radiation.

Protection grade IP4X or IP44 and Impact Grade 20 J (EN 61537) and IK10 (EN50085)

Insulating material, electrical safety and reduced maintenance costs.

Aenor N mark on product standards EN 61537 and EN 50085. CE compliance with directive 2014/35/EU.

Non-flame-propagating. Reaction to fire, V0 grade and M1 classification

Applications

Suitable for the protection of Metatray insulating trays in the routing of cables in electrical and telecommunications installations in different sectors, from wastewater treatment plants to the chemical and petrochemical industry, establishing itself as a highly corrosion-resistant solution that meets the most demanding standards. Its application is also ideal in other different sectors: service, telecommunications, electric mobility through vehicle charging stations, etc.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC002400	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,003	
Colour		Grey RAL 7035	
Flange (mm)		60	
Width (mm)		200	
kg/u		1,201	
u		1	
Material		PVC	
Working temperature range (°C)		-20 / 60 °C	
Fire resistance		GRADO UL94: V0	
UV Behaviour		Resistant acc. to UL568	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

