


Megaband Marine 90° Bend

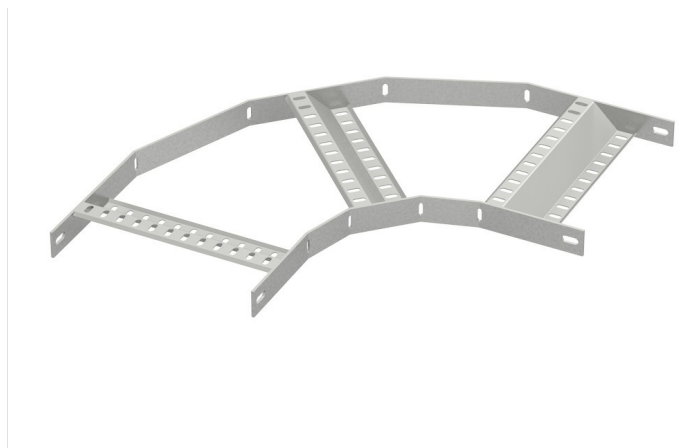

Description

Metal accessory with welded rungs for 90° horizontal bends in installations with Megaband® Marine ladder. It allows turns and changes of direction to be made very easily. Available in various protection systems.

Advantages

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

Z-shaped and symmetrical crossbars, allowing the curve to be installed in any position. They also have multiple holes that facilitate the fixing of the cables.

It allows you to create 90° angle bends, making changes in direction in the installation layout.

CE certified in compliance with the low voltage directive 2014/35 / EU

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port: and Maritime applications.

Solutions



Main technical characteristics

 40	 100, 200, 300, 400, 500, 600	 150	90	 1	 20 J	 -50 / 150 °C	 A1 No combustible
ETIM 10							
EC001535							

Product data

Ⓢ	Class 61537		Ref	kg/u	Ⓜ
GC	Class 8	100	82003132	1,961	Steel with surface coating
GC	Class 8	200	82003133	2,571	Steel with surface coating
GC	Class 8	300	82003134	3,171	Steel with surface coating
GC	Class 8	400	82003135	3,761	Steel with surface coating
GC	Class 8	500	82003136	4,371	Steel with surface coating
GC	Class 8	600	82003137	4,971	Steel with surface coating
INOX	Class 9D	100	82003138	1,861	Acero inoxidable AISI 316L
INOX	Class 9D	200	82003139	2,411	Acero inoxidable AISI 316L
INOX	Class 9D	300	82003140	2,971	Acero inoxidable AISI 316L
INOX	Class 9D	400	82003141	3,521	Acero inoxidable AISI 316L
INOX	Class 9D	500	82003142	4,071	Acero inoxidable AISI 316L
INOX	Class 9D	600	82003143	4,631	Acero inoxidable AISI 316L

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

