

Megaband Marine 90° Bend (Ref: 82003136)

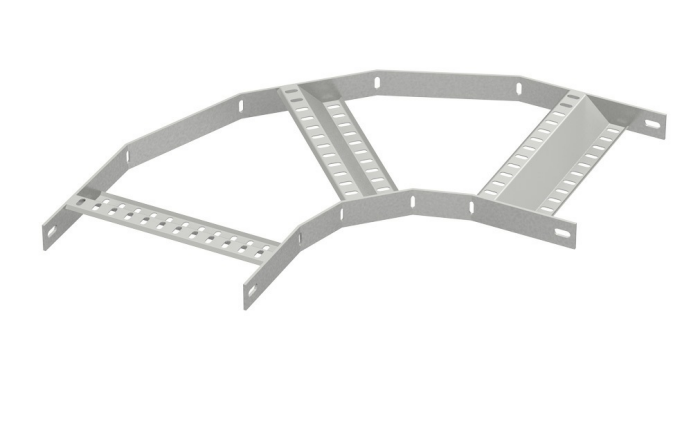

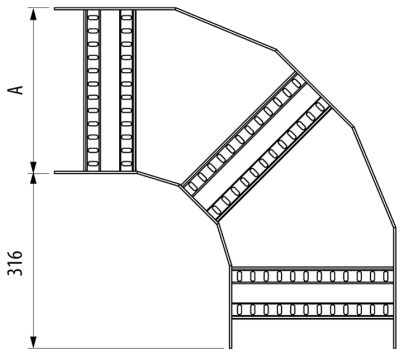

Description

Metal accessory with welded rungs for 90° horizontal bends in installations with Megaband® Marine ladder. Of 40 mm height, Width 500 mm, With GC protection system, HDG finish. It allows turns and changes of direction to be made very easily. Available in various protection systems.

Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

It allows you to create 90º angle bends, making changes in direction in the installation layout.

SAFECu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Z-shaped and symmetrical crossbars, allowing the curve to be installed in any position. They also have multiple holes that facilitate the fixing of the cables.

Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port and Maritime applications.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband Marine 90° Bend (Ref: 82003136)

Product data

ETIM 10	EC001535	**kg/u**	4,371
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	11,321	**u**	1
Protection System	GC	**Material**	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	**Impact Strength (J)**	20 J
Resistance Class	Class 8	**Working temperature range (°C)**	-50 / 150 °C
Flange (mm)	40	**Fire resistance**	A1 No combustible
Width (mm)	500		
R (mm)	150		
Angle	90		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."