
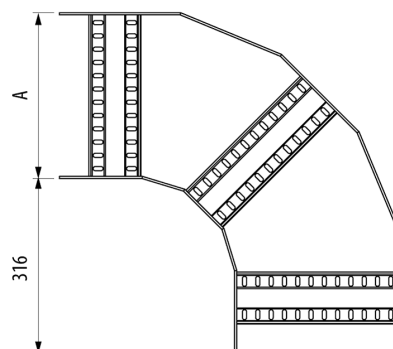


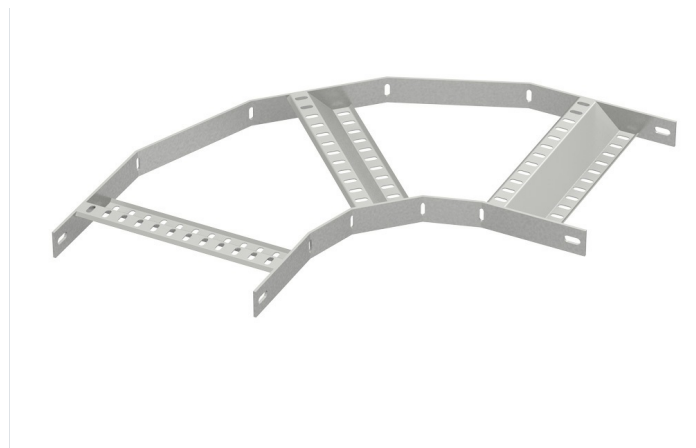

### Description

Metal accessory with welded rungs for 90° horizontal bends in installations with Megaband® Marine ladder. Of 40 mm height, Width 400 mm, With INOX protection system, I316L finish. It allows turns and changes of direction to be made very easily. Available in various protection systems.

### Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Available in widths from 200 to 1000 mm depending on the protection system. It has wide fixing options.

It allows you to create 90° angle bends, making changes in direction in the installation layout.

SAFEcu Protection system, copper-plated treatment, which confers hygienic properties by eliminating bacteria, viruses and fungi

Z-shaped and symmetrical crossbars, allowing the curve to be installed in any position. They also have multiple holes that facilitate the fixing of the cables.

### Applications

Suitable for installation in small spaces. Routing, Protection and Distribution of cables in electrical installations in the Naval Industry, Ships, Offshore Platforms, Port: and Maritime applications.

### Solutions



| Product data                          |  |                            |  |
|---------------------------------------|--|----------------------------|--|
| ETIM 10                               |  | EC001535                   |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 18,697                     |  |
| Protection System                     |  | INOX                       |  |
| Finish                                |  | Stainless Steel AISI 316L  |  |
| Resistance Class                      |  | Class 9D                   |  |
| Flange (mm)                           |  | 40                         |  |
| Width (mm)                            |  | 400                        |  |
| R (mm)                                |  | 150                        |  |
| Angle                                 |  | 90                         |  |
| kg/u                                  |  | 3,521                      |  |
| u                                     |  | 1                          |  |
| Material                              |  | Acero inoxidable AISI 316L |  |
| Impact Strength (J)                   |  | 20 J                       |  |
| Working temperature range (°C)        |  | -50 / 150 °C               |  |
| Fire resistance                       |  | A1 No combustible          |  |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |