
Megaband REP 90° Bend

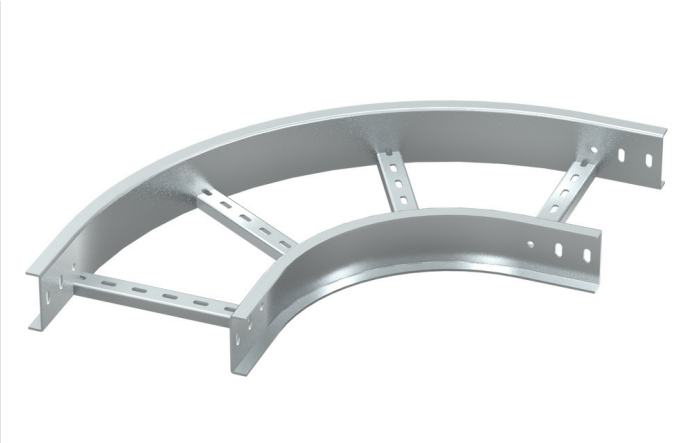

Description

Metal accessory with welded rungs and safety edge for 90° horizontal bends in a ladder installation. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Allows the cable installation to change direction horizontally at 90º angle.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating flat 90° bends with Megaband® REP ladder in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, oil & gas, power plants, mining and cement installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband REP 90° Bend

Main technical characteristics

GC | Class 8 | 70, 100, 120 | 100, 200, 300, 400, 600 | 300 | 90 | 1 | Steel with surface coating | 20 J | -50 / 150 °C | A1 No combustible | ETIM 10 EC001535

Product data

70	100	82002433	6,140
70	200	82002434	7,190
100	300	82002435	10,600
100	400	82002436	12,000
120	600	82002437	17,300

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."