

Megaband Rep Accessories

17/11/2026

Megaband REP 90° Bend (Ref: 82002433)

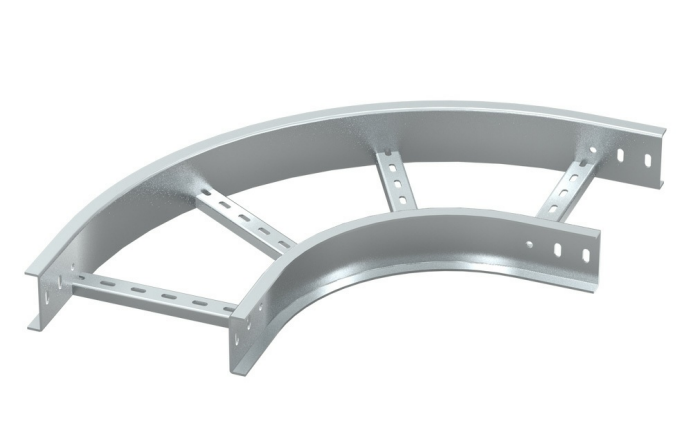

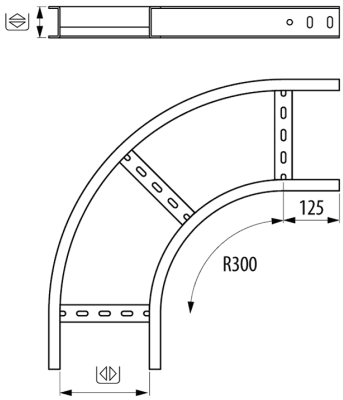

Description

Metal accessory with welded rungs and safety edge for 90° horizontal bends in a ladder installation. Of 70 mm height, Width 100 mm. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Allows the cable installation to change direction horizontally at 90º angle.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating flat 90° bends with Megaband® REP ladder in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, oil & gas, power plants, mining and cement installations.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Megaband REP 90° Bend (Ref: 82002433)

Product data

ETIM 10	EC001535	**kg/u**	6,140
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	1
Protection System	GC	**Material**	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	**Impact Strength (J)**	20 J
Resistance Class	Class 8	**Working temperature range (°C)**	-50 / 150 °C
Flange (mm)	70	**Fire resistance**	A1 No combustible
Width (mm)	100		
R (mm)	300		
Angle	90		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."