
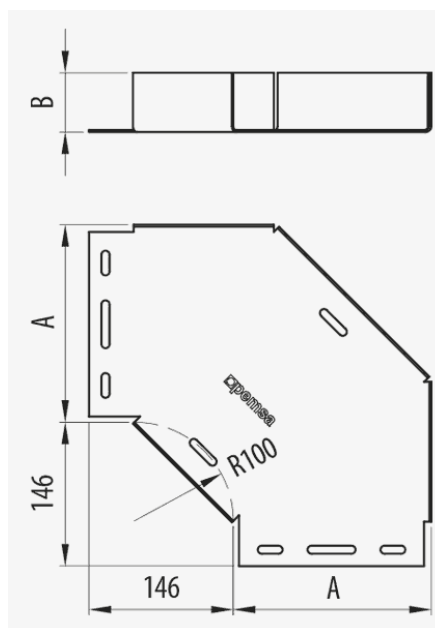


90° PQ Bend

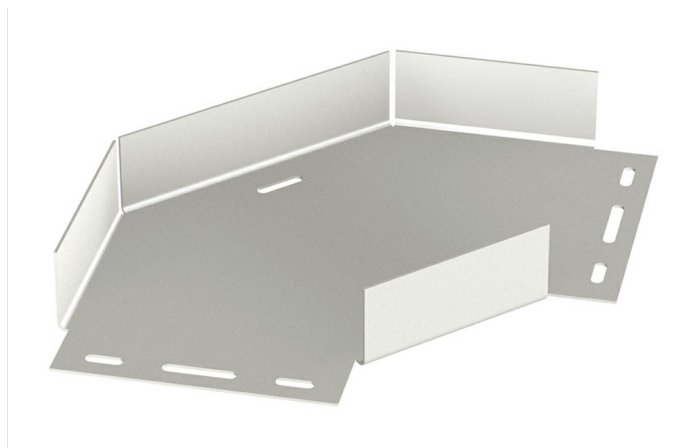

Description

Metal accessory for the creation of a 90° bend with the Pemsaband® PQU and PQW tray. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of 90° bends in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 GC	 Class 8	 15, 30, 50, 60	 100, 150, 200, 300, 400, 500, 600	 100	90	 1
 Steel with surface coating	 20 J	 -50 / 150 °C	 A1 No combustible	 ETIM 10 EC002400		

Product data

		Ref	kg/u
15	100	70203010	0,689
15	150	70203015	1,090
15	200	70203020	1,600
15	300	70203030	2,720
30	100	70203110	0,807
30	150	70203115	1,230
30	200	70203120	1,770
30	300	70203130	2,920
30	400	70203140	4,380
30	500	70203150	6,160
30	600	70203160	8,190
50	100	70203210	0,965
50	150	70203215	1,410
50	200	70203220	1,980
50	300	70203230	3,190
50	400	70203240	4,710
50	500	70203250	6,540
50	600	70203260	8,620
60	100	70203310	1,040
60	150	70203315	1,510
60	200	70203320	2,090
60	300	70203330	3,330
60	400	70203340	4,870
60	500	70203350	6,730
60	600	70203360	8,840

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint

90° PQ Bend

3/3

AL - Aluminum**LN** - Brass or Nickel-plated brass **Insulating materials****PC+ABS** - Halogen Free Polycarbonate + ABS**PVC** - Polyvinyl Chloride**PP** - Halogen Free Polypropylene**PA6** - Halogen Free Polyamide 6**PA12** - Halogen Free Polyamide 12**PU** - Polyurethane**PE** - Polyethylene**NBR** - NBR rubber**PET** - Thermoplastic Polyester**TPV** - Thermoplastic