


PQU AL 90° Bend

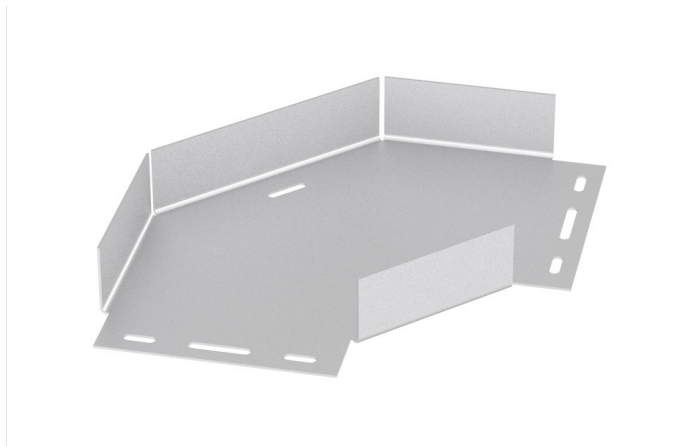

Description

Metal accessory for creating a 90° bend for Pemsaband® PQU AL trays. Assembly using bolts. Made from Aluminium alloy 1050H24.

Advantages

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Mounting and fastening by using screws.

CEPSA product approval. Designed according to ESP-2208-5 specification.

CE certified in compliance with the low voltage directive 2014/35 / EU

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

Solutions



Main technical characteristics									
 AL	 30, 60	 100, 200, 300, 400, 600	 200	90	 1	 Aluminum	 20 J	 -50 / 150 °C	
 A1 No combustible	ETIM 10 EC002400								

Product data			
		Ref	kg/u
30	100	82002261	0,588
30	200	82002262	1,080
30	300	82002263	1,720
30	400	82002264	2,400
30	600	82002265	4,220
60	100	82002266	0,747
60	200	82002267	1,270
60	300	82002268	1,950
60	400	82002269	2,660
60	600	82002270	4,550

 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic