
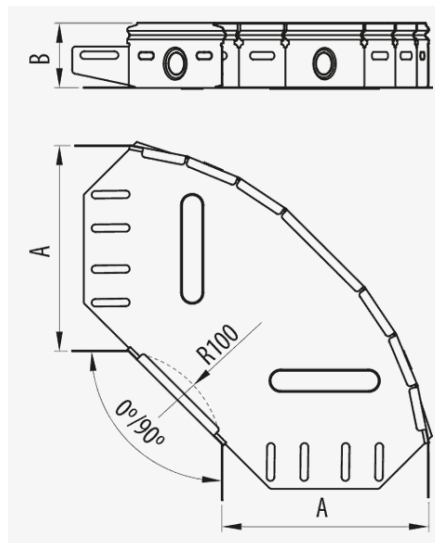


Adjustable Bend Click

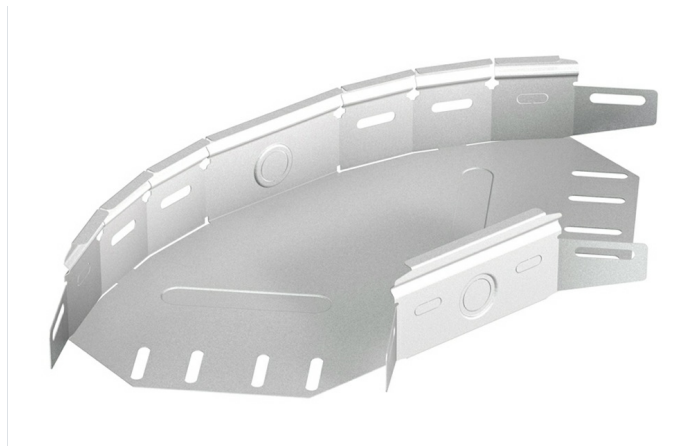

Description

Adjustable metal bend for different angles with varying degrees in an electrical installation with Pemsaband® and Inducanal® trays. It allows the creation of angles from 0 to 90°. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

The design allows for the adjustment of the angle of the bend.

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

Applications

Suitable for making bends with different angles. It adapts to the required angles in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.


Solutions



Main technical characteristics

 35, 60	 100, 150, 200, 300	 100	 1	 20 J	 -50 / 150 °C	 A1 No combustible	ETIM EC002400
--	--	---	---	--	--	---	------------------

Product data

Ⓢ	61537			Ref	kg/L	Ⓜ
PG	Class 3	35	100	70028110	0.251	Steel with surface coating
PG	Class 3	35	150	70028115	0.403	Steel with surface coating
PG	Class 3	35	200	70028120	0.545	Steel with surface coating
PG	Class 3	35	300	70028130	0.955	Steel with surface coating
PG	Class 3	60	100	70028210	0.331	Steel with surface coating
PG	Class 3	60	150	70028215	0.500	Steel with surface coating
PG	Class 3	60	200	70028220	0.642	Steel with surface coating
PG	Class 3	60	300	70028230	1.090	Steel with surface coating
GC	Class 5	35	100	70038110	0.270	Steel with surface coating
GC	Class 5	35	150	70038115	0.434	Steel with surface coating
GC	Class 5	35	200	70038120	0.586	Steel with surface coating
GC	Class 5	35	300	70038130	1.030	Steel with surface coating
GC	Class 5	60	100	70038210	0.357	Steel with surface coating
GC	Class 5	60	150	70038215	0.538	Steel with surface coating
GC	Class 5	60	200	70038220	0.690	Steel with surface coating
GC	Class 5	60	300	70038230	1.170	Steel with surface coating
INOX	Class 9C	60	100	70058210	0.290	Stainless steel AISI 304
INOX	Class 9C	60	150	70058215	0.438	Stainless steel AISI 304
INOX	Class 9C	60	200	70058220	0.562	Stainless steel AISI 304
INOX	Class 9C	60	300	70058230	0.949	Stainless steel AISI 304
INOX	Class 9D	60	100	70068210	0.290	Acero inoxidable AISI 316L
INOX	Class 9D	60	150	70068215	0.438	Acero inoxidable AISI 316L
INOX	Class 9D	60	200	70068220	0.562	Acero inoxidable AISI 316L
INOX	Class 9D	60	300	70068230	0.949	Acero inoxidable AISI 316L
AZ+	Class 8	60	100	82003861	0.331	Steel with surface coating
AZ+	Class 8	60	150	82003862	0.500	Steel with surface coating
AZ+	Class 8	60	200	82003863	0.642	Steel with surface coating
AZ+	Class 8	60	300	82003864	1.090	Steel with surface coating

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

Adjustable Bend Click

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic



Adjustable Bend Click

Product applications

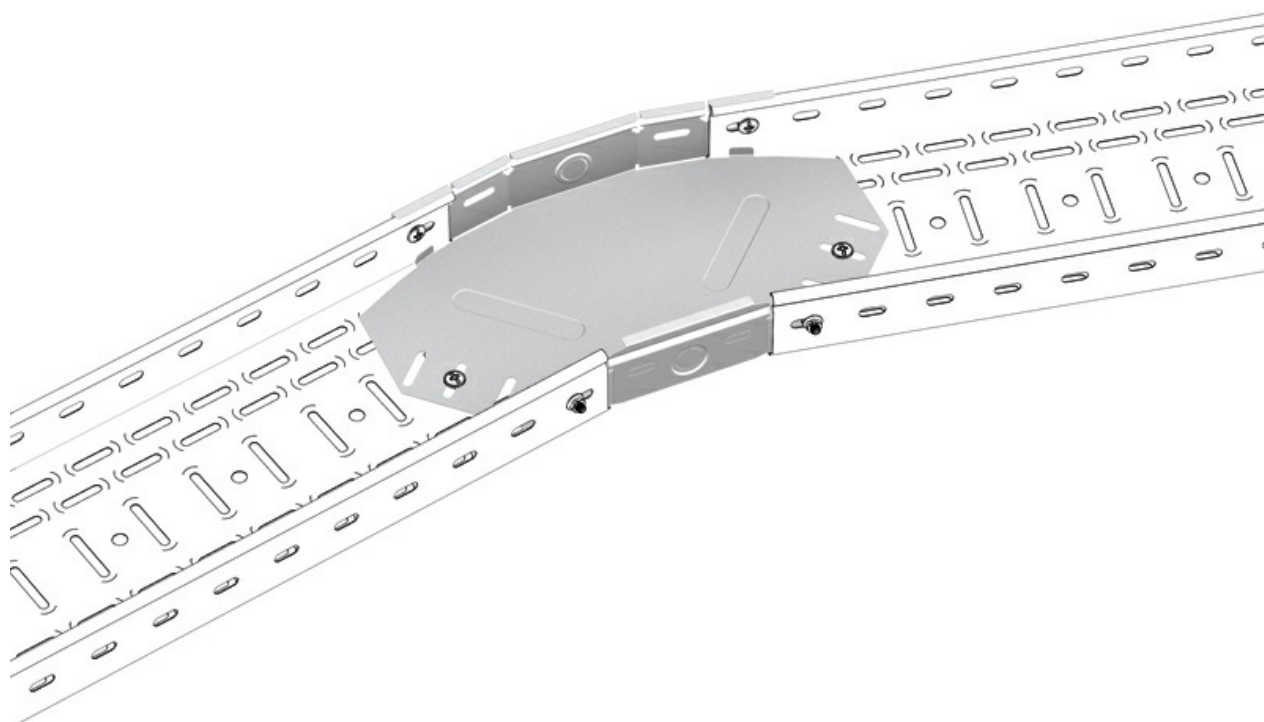

Adjustable Bend Click



Adjustable Bend Click

