
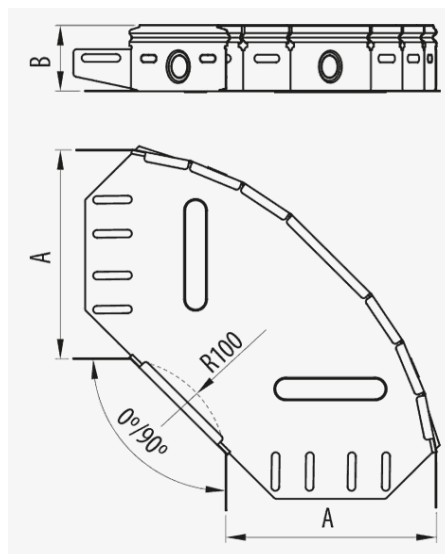


Adjustable Bend Click (Ref: 70038115)

1/5

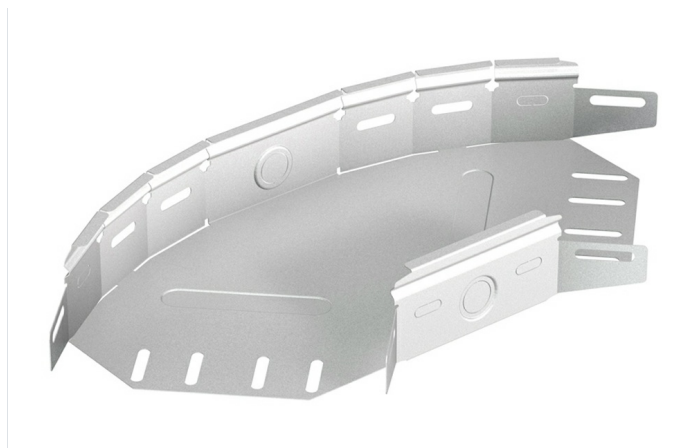

Description

Adjustable metal bend for different angles with varying degrees in an electrical installation with Pemsaband® and Inducanal® trays. Of 35 mm height, Width 150 mm, With GC protection system, HDG finish. It allows the creation of angles from 0 to 90°. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

The design allows for the adjustment of the angle of the bend.

Applications

Suitable for making bends with different angles. It adapts to the required angles in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Adjustable Bend Click (Ref: 70038115)

2/5

Product data

ETIM 10	EC002400	kg/u	0,434
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,125	u	1
Protection System	GC	Material	Steel with surface coating
Finish	HDG, Hot Dip Galvanised	Impact Strength (J)	20 J
Resistance Class	Class 5	Working temperature range (°C)	-50 / 150 °C
Flange (mm)	35	Fire resistance	A1 No combustible
Width (mm)	150		
R (mm)	100		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com


Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Adjustable Bend Click (Ref: 70038115)

3/5

Product applications

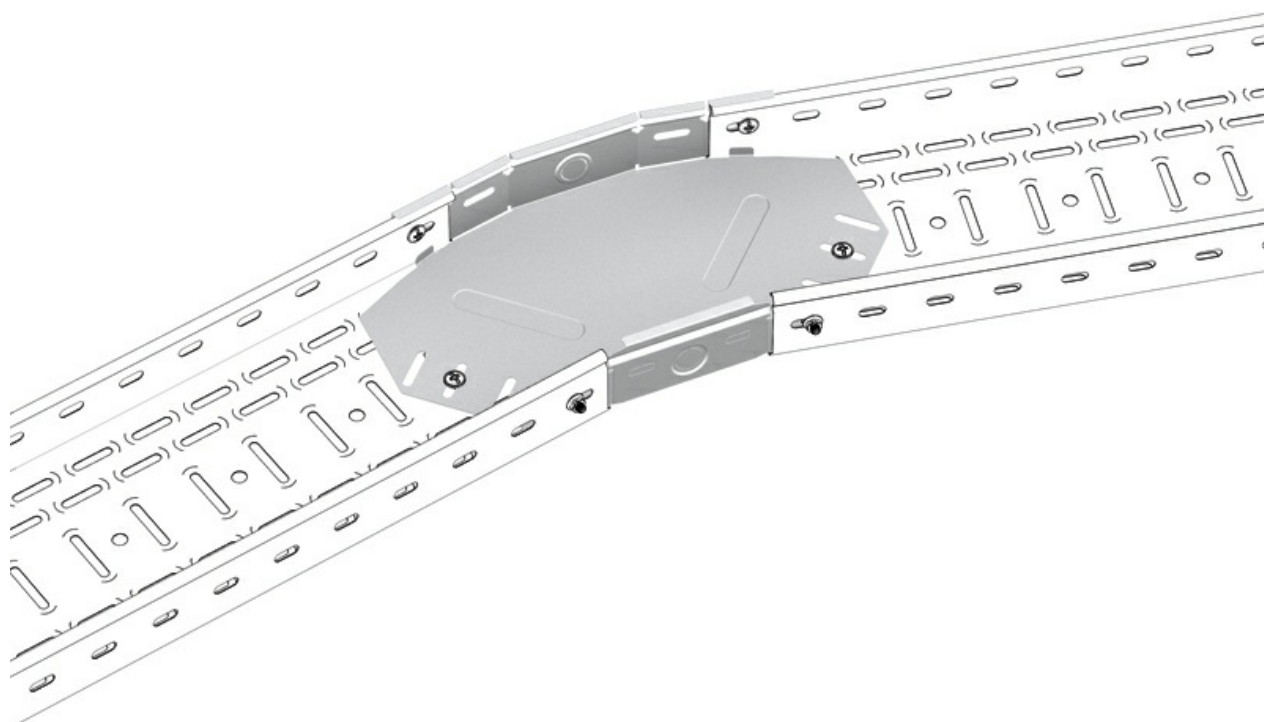

www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Adjustable Bend Click (Ref: 70038115)



Adjustable Bend Click (Ref: 70038115)

