


Adjustable Bend Click (Ref: 82003864)

1/5

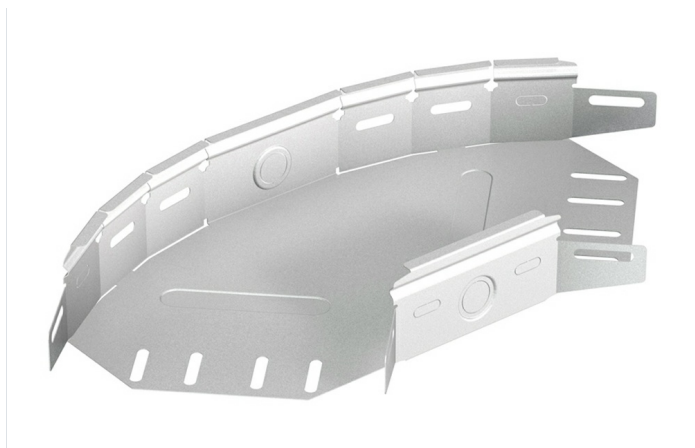

Description

Adjustable metal bend for different angles with varying degrees in an electrical installation with Pemsaband® and Inducanal® trays. Of 60 mm height, Width 300 mm, With AZ+ protection system, ZM finish. It allows the creation of angles from 0 to 90°. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

The design allows for the adjustment of the angle of the bend.

Applications

Suitable for making bends with different angles. It adapts to the required angles in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data			
ETIM 10		EC002400	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		3,521	
Protection System		AZ+	
Finish		ZM High Resistance Alloy	
Resistance Class		Class 8	
Flange (mm)		60	
Width (mm)		300	
R (mm)		100	
kg/u		1,090	
u		1	
Material		Steel with surface coating	
Impact Strength (J)		20 J	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Adjustable Bend Click (Ref: 82003864)

3/5

Product applications



Adjustable Bend Click (Ref: 82003864)



Adjustable Bend Click (Ref: 82003864)

