


Rejiband Radius Support

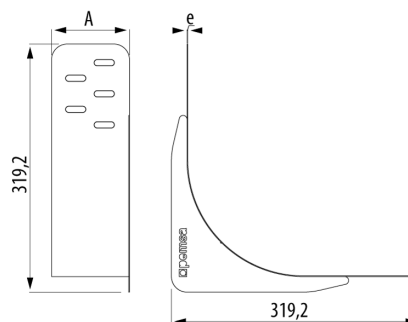

Description

Accessory that improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers. Thanks to its design, it protects the curvature of the cables by guiding them during changes or flat turns. Made of steel, available in various protection systems.

Advantages

Improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers

Maximum protection of the wiring in the bends or changes of planes.

Suitable for cable trays with 60 and 100 mm height

CE certified in compliance with the low voltage directive 2014/35 / EU and international product standard IEC 61537

Available in PG, BK8 and GC protection systems

Suitable for cable management of data cables in Data center and IT installations

Applications

Suitable for the protection of bends in Rejiband® wire mesh tray for routing cables in electrical and telecommunications installations in industrial facilities, infrastructure and civil works, service sector and especially designed for data cable installations and Data Centers.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Main technical characteristics

 100, 60, 150	 1	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC002935
---	---	--	--	---	---------------------

Product data

	 61537		Ref	kg/u
EZ	Class 3	100	82003328	0,518
GC	Class 5	100	82003329	0,561
EZ	Class 3	60	82003330	0,351
GC	Class 5	60	82003332	0,380
EZ	Class 3	150	82003453	0,728
GC	Class 5	150	82003455	0,788

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications

