


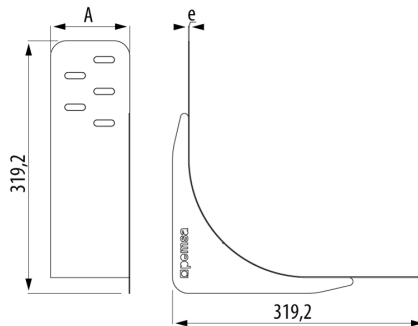

Description

Accessory that improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers. Of 100 mm height, With EZ protection system. Thanks to its design, it protects the curvature of the cables by guiding them during changes or flat turns. Made of steel, available in various protection systems.

Advantages

Suitable for cable trays with 60 and 100 mm height

CE certified in compliance with the low voltage directive 2014/35 / EU and international product standard IEC 61537

Available in PG, BK8 and GC protection systems

Maximum protection of the wiring in the bends or changes of planes.

Improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers

Applications

Suitable for the protection of bends in Rejiband® wire mesh tray for routing cables in electrical and telecommunications installations in industrial facilities, infrastructure and civil works, service sector and especially designed for data cable installations and Data Centers.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC002935	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Steel with surface coating
Protection System	EZ	Working temperature range (°C)	-50 / 150 °C
Finish	EZ3, Electrogalvanised	Fire resistance	A1 No combustible
Resistance Class	Class 3		
Flange (mm)	100		
kg/u	0,518		

🔒 Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

🔒 Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



Product applications

