
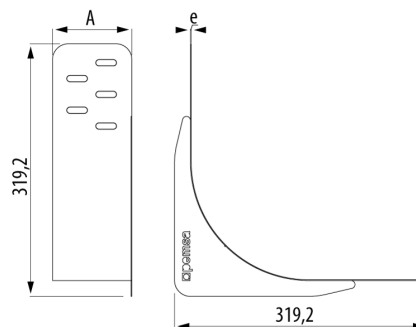


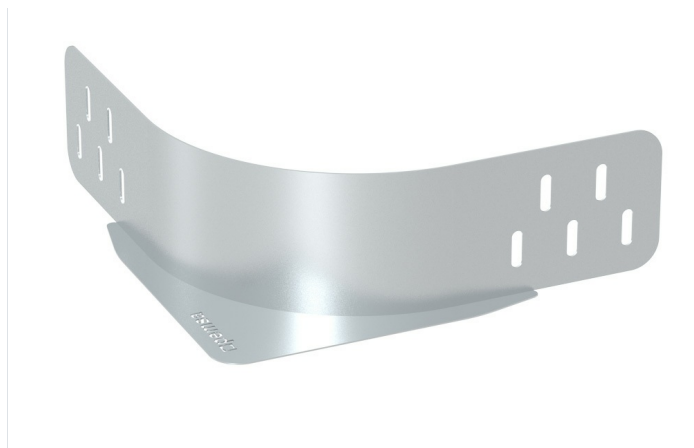

Description

Accessory that improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers. Of 100 mm height, With GC protection system. Thanks to its design, it protects the curvature of the cables by guiding them during changes or flat turns. Made of steel, available in various protection systems.

Advantages

Suitable for cable trays with 60 and 100 mm height

CE certified in compliance with the low voltage directive 2014/35 / EU and international product standard IEC 61537

Available in PG, BK8 and GC protection systems

Maximum protection of the wiring in the bends or changes of planes.

Improves and ensures the creation of bends in Rejiband wire mesh trays for data cable installations and Data Centers

Applications

Suitable for the protection of bends in Rejiband® wire mesh tray for routing cables in electrical and telecommunications installations in industrial facilities, infrastructure and civil works, service sector and especially designed for data cable installations and Data Centers.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC002935	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	
Protection System		Steel with surface coating	
Finish		Working temperature range (°C)	
Resistance Class		-50 / 150 °C	
Flange (mm)		Fire resistance	
kg/u		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

