

# Crossover MEGAband ( Ref: 93234900 )

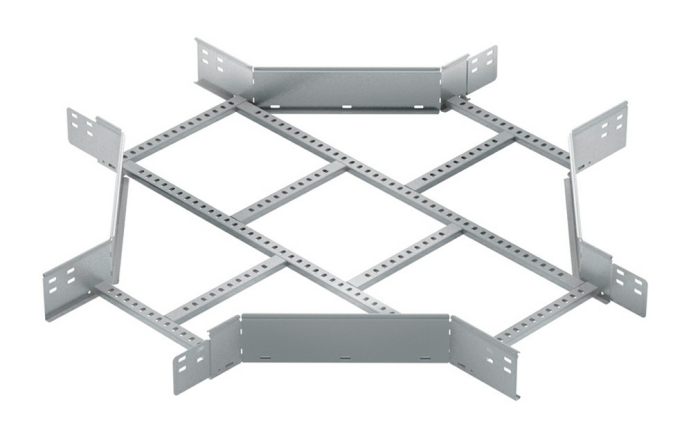

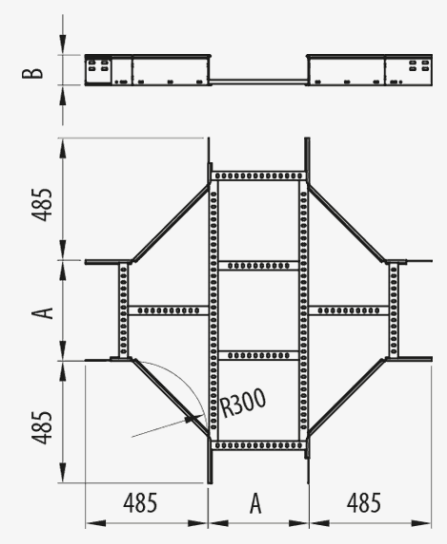


## Description

Metal accessory for the creation of crossovers between two lines of Megaband® ladder. Of 100 mm height, Width 900 mm, With GC protection system, HDG finish. Quick connection assembly using the click system. Made of steel, available in different sizes and Protection Systems. Bending radius 300 mm. Check availability of 600 mm radius.

## Advantages

Curved safety edge which offers maximum protection.

Connection to ladder by rapid assembly Click system. Only the Megaband® M8 joint kit or M8 nuts and bolts required

Available in various protection systems: EZ, GC and stainless steel AISI 304 and AISI 316L.

Electrical continuity guaranteed according to standard IEC61537.

Divides the electrical installation from one to three different lines.

## Applications

Suitable for the creation of Crossovers with Megaband® Ladders in the conduction of cables in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# Crossover MEGAband ( Ref: 93234900 )

## Product data

| | | | |
|---|---|---|---|
| **ETIM 10** | EC001559 | **kg/u** | 12,801 |
| **Huella de CO2. GWP A1-A3 (kg CO2 eq.)** | 33,155 | **u** | 1 |
| **Protection System** | GC | **Material** | Steel with surface coating |
| **Finish** | HDG, Hot Dip Galvanised | **Impact Strength (J)** | 20 J |
| **Resistance Class** | Class 6 | **Working temperature range (°C)** | -50 / 150 °C |
| **Flange (mm)** | 100 | **Fire resistance** | A1 No combustible |
| **Width (mm)** | 900 | | |
| **R (mm)** | 300 | | |

## Ⓢ Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Ⓜ Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber


**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## Product applications

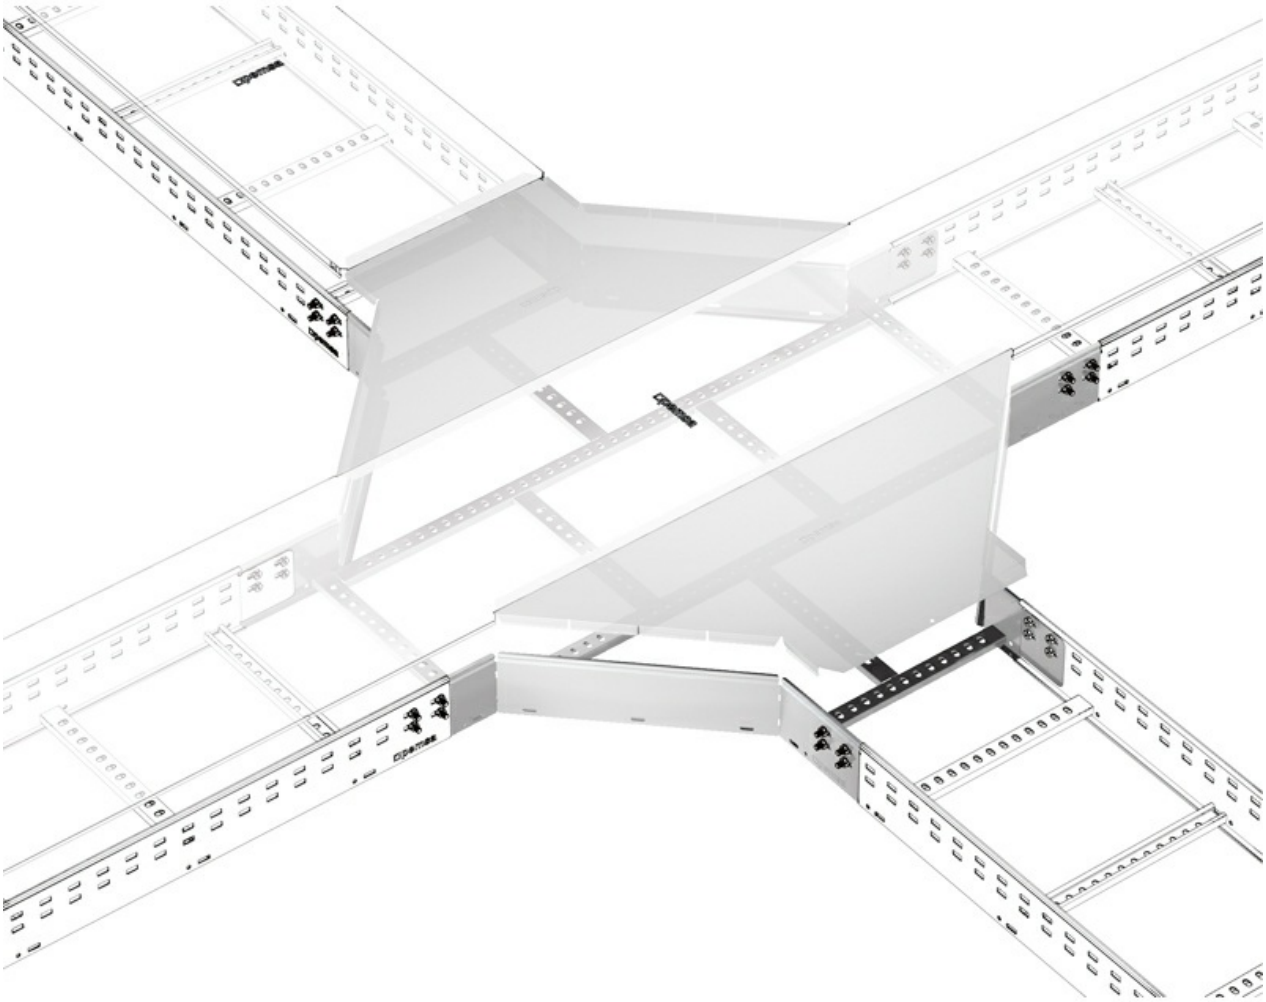



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."