


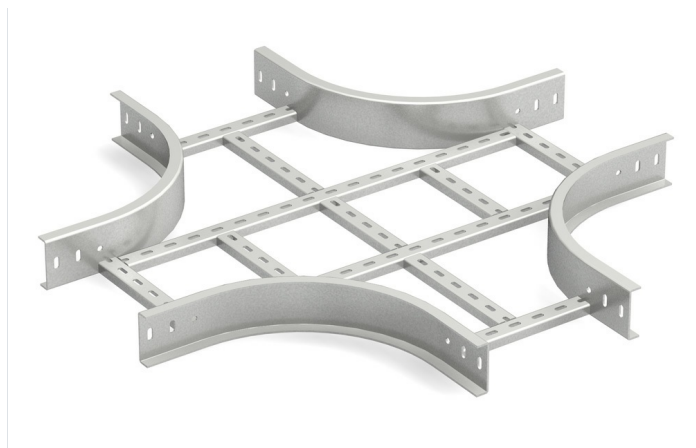

Description

Metal accessory for creating a crossover between two lines of Megaband® REP ladder. Assembly using bolts. Bend radius 300mm. Check availability of 600mm radius. Made from steel with GC Protection system.

Advantages

Available in heights 70, 100 120 mm and widths 100 to 600 mm.

Specially designed for the petrochemical sector, with REPSOL approvals, ED-P-11-02

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating crossovers with Megaband® REP ladder in electrical and telecommunications installations and supporting large loads in industrial, petrochemical, oil & gas, power plants, mining and cement installations.

Solutions



Main technical characteristics

 GC	 Class 8	 70, 100, 120	 100, 200, 300, 400, 600	 300	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001559					

Product data

		Ref	kg/u
70	100	82002438	12,800
70	200	82002439	15,400
100	300	82002440	19,700
100	400	82002441	21,100
120	600	82002442	27,800

Protection System

- CU** - Copper electroplated
- PG** - Pregalvanised
- EZ** - Electrogalvanised
- BC** - Electrogalvanised Bichromate
- BK8** - High Resistance Coating
- GC** - Hot Dip Galvanising
- INOX** - Stainless Steel
- PT** - Polyester Paint
- AL** - Aluminum
- LN** - Brass or Nickel-plated brass

Insulating materials

- PC+ABS** - Halogen Free Polycarbonate + ABS
- PVC** - Polyvinyl Chloride
- PP** - Halogen Free Polypropylene
- PA6** - Halogen Free Polyamide 6
- PA12** - Halogen Free Polyamide 12
- PU** - Polyurethane
- PE** - Polyethylene
- NBR** - NBR rubber
- PET** - Thermoplastic Polyester
- TPV** - Thermoplastic

