


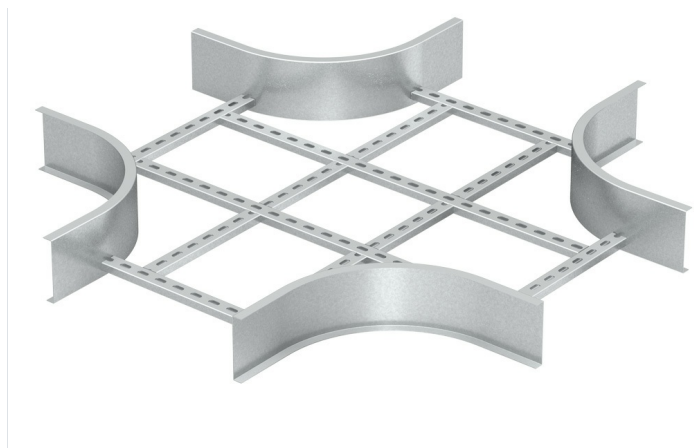

Description

Metal accessory for creating a crossover between two lines of Nemaband® ladder. Allows you to change a single cable route into three separate routes.

Advantages

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

Divides the electrical installation from one to three different lines.

Cable tray connection using M8 screws or Nemaband® M8 joint kit

CE certified in compliance with the low voltage directive 2014/35 / EU

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

Applications

Suitable for creating crossovers with Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

Solutions



Main technical characteristics

 GC	 Class 8	 100, 150	 150, 300, 450, 600, 750, 900	 1	 Steel with surface coating	 20 J
 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001559				

Product data

			Ref	kg/u
100	150	300	82002869	9,850
100	300	300	82002870	11,200
100	450	300	82002871	15,400
100	600	300	82002872	17,200
100	750	300	82002873	19,800
100	900	300	82002874	21,700
150	150	300	82002875	12,500
150	300	300	82002876	13,800
150	450	300	82002877	18,000
150	600	300	82002878	19,800
150	750	300	82002879	22,400
150	900	300	82002880	24,300
100	150	600	82002881	14,600
100	300	600	82002882	16,000
100	450	600	82002883	22,000
100	600	600	82002884	23,700
100	750	600	82002885	26,300
100	900	600	82002886	28,700
150	150	600	82002887	18,300
150	300	600	82002888	19,700
150	450	600	82002889	25,600
150	600	600	82002890	27,400
150	750	600	82002891	30,000
150	900	600	82002892	32,400

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

