
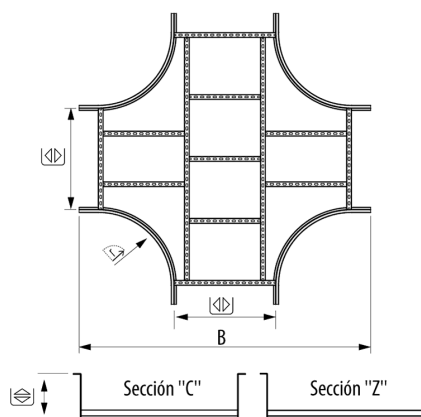


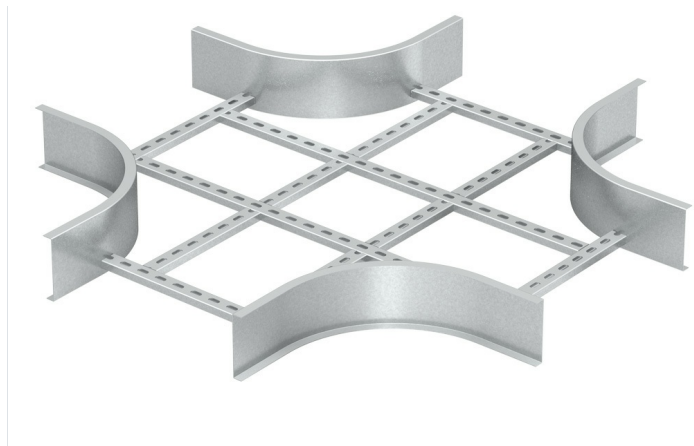

### Description

Metal accessory for creating a crossover between two lines of Nemaband® ladder. Of 150 mm height, Width 300 mm. Allows you to change a single cable route into three separate routes.

### Advantages

CE certified in compliance with the low voltage directive 2014/35 / EU

Cable tray connection using M8 screws or Nemaband® M8 joint kit

Divides the electrical installation from one to three different lines.

Reinforced profiles in C and Z formats that stiffen the construction of the cable ladder, to meet the demand in most markets.

GC Protection System. Hot dip Galvanised with 85 microns of thickness. Class 8 according to IEC 61537.

### Applications

Suitable for creating crossovers with Nemaband® ladder for routing, protecting and distributing cables in electrical installations in industrial applications and large spans in: Oil & Gas and Petrochemical Industry, Power Plants, Electric Power Plants, etc. Water Treatment, Mining and Cement Offshore Platforms, Ports, Maritime Applications. Industrial projects in aggressive environments.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



## Product data

|                                              |                         |                                       |                            |
|----------------------------------------------|-------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC001559                | <b>kg/u</b>                           | 13,800                     |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 35,742                  | <b>u</b>                              | 1                          |
| <b>Protection System</b>                     | GC                      | <b>Material</b>                       | Steel with surface coating |
| <b>Finish</b>                                | HDG, Hot Dip Galvanised | <b>Impact Strength (J)</b>            | 20 J                       |
| <b>Resistance Class</b>                      | Class 8                 | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Flange (mm)</b>                           | 150                     | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Width (mm)</b>                            | 300                     |                                       |                            |
| <b>R (mm)</b>                                | 300                     |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

