
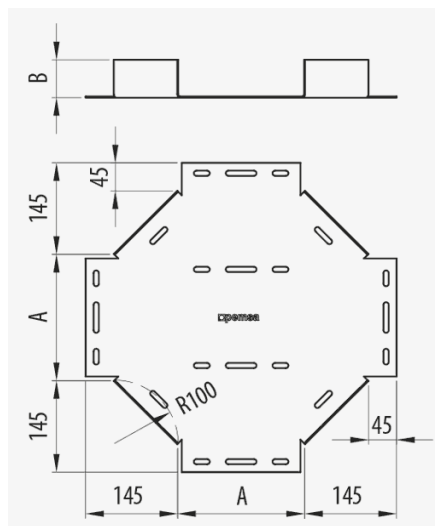


PQ Crossover

1/3

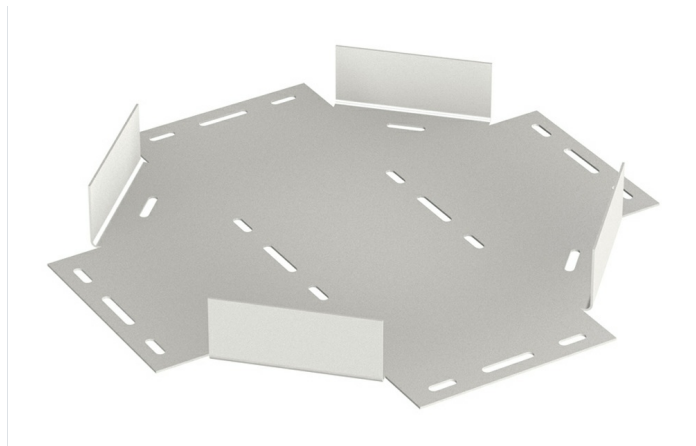

Description

Metal accessory to create crossover between two lines of Pemsaband® PQU or PQW trays allowing for cables to re-route in three separate ways. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel and available in various sizes, with GC Protection System 85 microns thick.

Advantages

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Applications

Suitable for the creation of crossovers in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Main technical characteristics

 GC	 Class 8	 15, 30, 50, 60	 100, 150, 200, 300, 400, 500, 600	 100	 1	 Steel with surface coating
 20 J	 -50 / 150 °C	 A1 No combustible	ETIM 10 EC001542			

Product data

		Ref	kg/u
15	100	70233010	1,500
15	150	70233015	2,180
15	200	70233020	2,950
15	300	70233030	4,730
30	100	70233110	1,650
30	150	70233115	2,320
30	200	70233120	3,090
30	300	70233130	4,880
30	400	70233140	6,930
30	500	70233150	9,440
30	600	70233160	12,200
50	100	70233210	1,840
50	150	70233215	2,510
50	200	70233220	3,280
50	300	70233230	5,070
50	400	70233240	7,120
50	500	70233250	9,630
50	600	70233260	12,400
60	100	70233310	1,930
60	150	70233315	2,610
60	200	70233320	3,380
60	300	70233330	5,170
60	400	70233340	7,220
60	500	70233350	9,720
60	600	70233360	12,500

 Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint

PQ Crossover

3/3

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

