
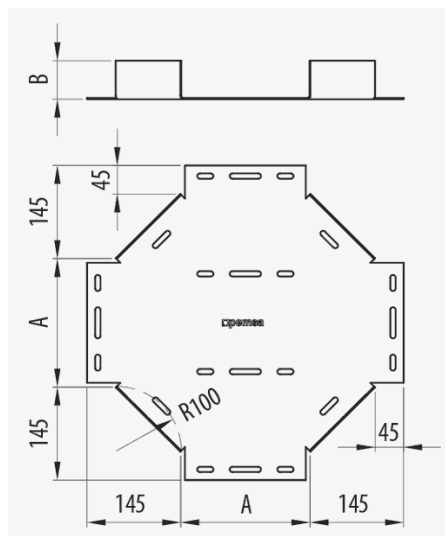


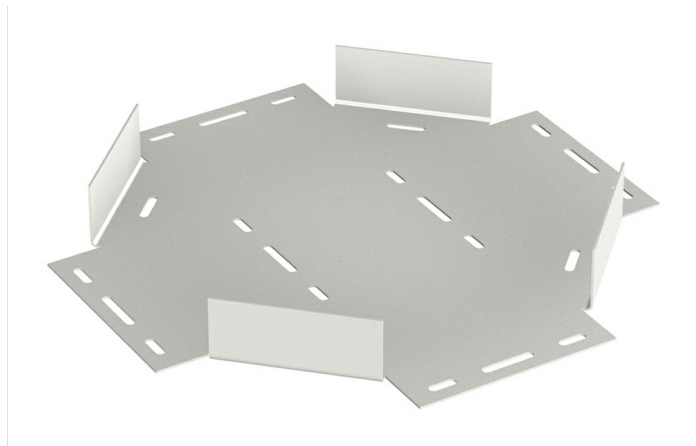

### Description

Metal accessory to create crossover between two lines of Pemsaband® PQU or PQW trays allowing for cables to re-route in three separate ways. Of 50 mm height, Width 200 mm. Joins with nuts and bolts. Approved according to CEPSA and REPSOL specifications. Made of steel and available in various sizes, with GC Protection System 85 microns thick.

### Advantages

GC protection system (standard UNE-EN ISO 1461), suitable for outdoor installations and in aggressive environments. Corrosion resistance class 8 according to IEC 61537.

Compatible with Pemsaband® PQU and Pemsaband® PQW ranges.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Available for all heights 15, 30, 50, 60 and in widths from 100 to 600.

Specially designed for the petrochemical sector, with CEPSA and REPSOL approvals.

### Applications

Suitable for the creation of crossovers in Pemsaband® PQU and PQW trays, for the Support, management and distribution of cables in Petrochemical, Oil & Gas, Offshore, Civil works and Infrastructures, as well as in tunnels and installation galleries.

### Solutions



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

## Product data

|                                              |                         |                                       |                            |
|----------------------------------------------|-------------------------|---------------------------------------|----------------------------|
| <b>ETIM 10</b>                               | EC001542                | <b>kg/u</b>                           | 3,280                      |
| <b>Huella de CO2. GWP A1-A3 (kg CO2 eq.)</b> | 8,495                   | <b>u</b>                              | 1                          |
| <b>Protection System</b>                     | GC                      | <b>Material</b>                       | Steel with surface coating |
| <b>Finish</b>                                | HDG, Hot Dip Galvanised | <b>Impact Strength (J)</b>            | 20 J                       |
| <b>Resistance Class</b>                      | Class 8                 | <b>Working temperature range (°C)</b> | -50 / 150 °C               |
| <b>Flange (mm)</b>                           | 50                      | <b>Fire resistance</b>                | A1 No combustible          |
| <b>Width (mm)</b>                            | 200                     |                                       |                            |
| <b>R (mm)</b>                                | 100                     |                                       |                            |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



[www.pemsa-rejiband.com](http://www.pemsa-rejiband.com)

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

