
# PQU AL Crossover

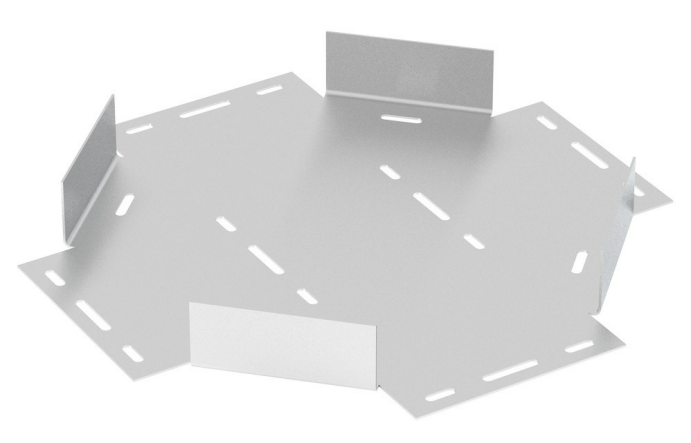

## Description

Metal accessory for creating a crossover between two lines of Pemsaband® PQU AL trays. Allows you to change a single cable route into three separate routes. Assembly using bolts. Made from Aluminium ally 1050H24.

## Advantages

Available in 30, 50 and 60 mm height and 100, 200, 300, 400, and 600 mm wide.

Mounting and fastening by using screws.

CEPSA product approval. Designed according to ESP-2208-5 specification.

Conforms to IEC 61537 and CE Conformity to Directive 2014/35/EU.

Made of Aluminum alloy 1050H24. Excellent corrosion resistance and mechanical properties.

## Applications

Suitable for fixing Rejiband® trays to supports for cable management in electrical and telecommunications installations, industrial installations, infrastructure and civil works and the service sector.

## Solutions



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

# PQU AL Crossover

## Main technical characteristics

AL | 30, 60 | 100, 200, 300, 400, 600 | 200 | 1 | Aluminum | 20 J | -50 / 150 °C

A1 No combustible | ETIM 10 EC001542

## Product data

| | | REF | kg/u |
|---|---|---|---|
| 30 | 100 | 82002251 | 1,440 |
| 30 | 200 | 82002252 | 2,300 |
| 30 | 300 | 82002253 | 3,280 |
| 30 | 400 | 82002254 | 4,400 |
| 30 | 600 | 82002255 | 7,050 |
| 60 | 100 | 82002256 | 1,670 |
| 60 | 200 | 82002257 | 2,530 |
| 60 | 300 | 82002258 | 3,510 |
| 60 | 400 | 82002259 | 4,630 |
| 60 | 600 | 82002260 | 7,280 |

## Protection System

**CU** - Copper electroplated

**PG** - Pregalvanised

**EZ** - Electrogalvanised

**BC** - Electrogalvanised Bichromate

**BK8** - High Resistance Coating

**GC** - Hot Dip Galvanising

**INOX** - Stainless Steel

**PT** - Polyester Paint

**AL** - Aluminum

**LN** - Brass or Nickel-plated brass

## Insulating materials

**PC+ABS** - Halogen Free Polycarbonate + ABS

**PVC** - Polyvinyl Chloride

**PP** - Halogen Free Polypropylene

**PA6** - Halogen Free Polyamide 6

**PA12** - Halogen Free Polyamide 12

**PU** - Polyurethane

**PE** - Polyethylene

**NBR** - NBR rubber

**PET** - Thermoplastic Polyester

**TPV** - Thermoplastic



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."