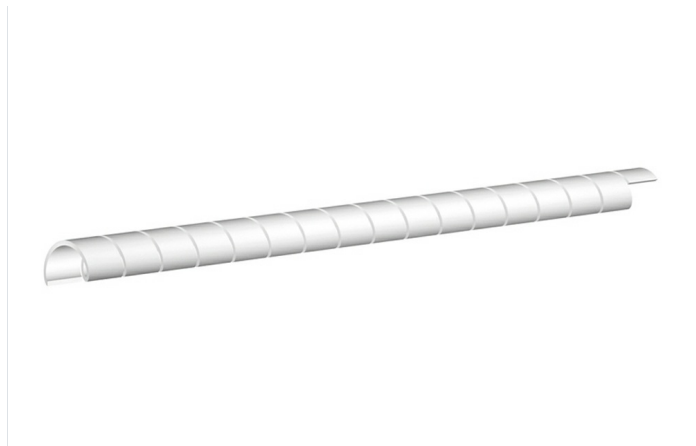


Description

Spiral tape for the wrapping and protection of cables. Available in different sizes. Made of polyethylene, white RAL 9010 or black RAL 7021.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in two colours: White RAL 9010 and black RAL 9005.

Made of polyethylene.

No flame propagation.

Applications

Suitable for the wrapping and management of cables in general applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC002604	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)			
Colour		White RAL 9010	
Cable diameter range		6 / 40	
Ø d1 (mm)		4	
Ø d2 (mm)		6	
Ø C (mm)		9	
		kg/u	0,016
		Material	Polyethylene
		Working temperature range (°C)	-45 / 90 °C
		Fire resistance	Flame retardant

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic