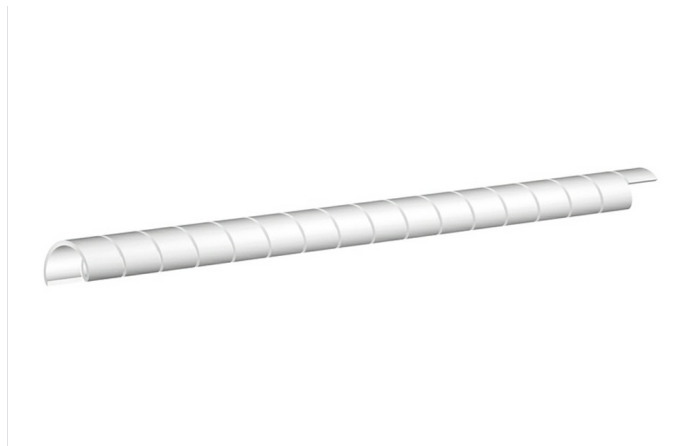


Description

Spiral tape for the wrapping and protection of cables. Available in different sizes. Made of polyethylene, white RAL 9010 or black RAL 7021.

Advantages

CE conformity to the 2014/35 directive and the EN IEC 61386 standard.

Available in two colours: White RAL 9010 and black RAL 9005.

Made of polyethylene.

No flame propagation.

Applications

Suitable for the wrapping and management of cables in general applications.

Solutions



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data

ETIM 10	EC002604	kg/u	0,043
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		Material	Polyethylene
Colour	White RAL 9010	Working temperature range (°C)	-45 / 90 °C
Cable diameter range	10 / 90	Fire resistance	Flame retardant
Ø d1 (mm)	9.2		
Ø d2 (mm)	12		
Ø C (mm)	12		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic

