
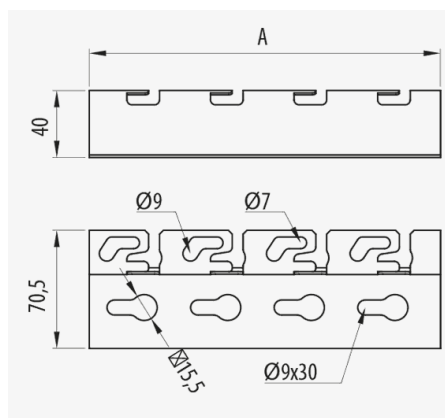


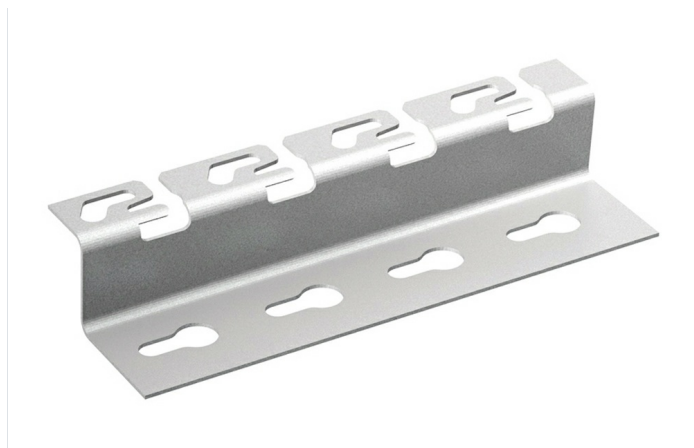

Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Of 40 mm height, Width 300 mm, With INOX protection system, I304 finish. The Click system, for quick connection of wire mesh trays, allows for installation at a height of 40 mm without the need of any fixings. Available in different sizes and Protection Systems.

Advantages

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Allows the installation of the tray at a distance of 40 mm from the wall or floor.

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

Applications

It is suitable for the installation of Rejiband® and Pemsaband trays and can be mounted vertically on a wall and is an efficient and simple solution as well in false floor installations.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES



www.pemsa-rejiband.com



Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Product data

ETIM 10	EC000022	u	10
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	1,779	Material	Stainless steel AISI 304
Protection System	INOX	SWL (kg)	250
Finish	Stainless Steel AISI 304	Working temperature range (°C)	-50 / 150 °C
Resistance Class	Class 9C	Fire resistance	A1 No combustible
Flange (mm)	40		
Width (mm)	300		
kg/u	0,335		

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

PET - Thermoplastic Polyester

TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications

