
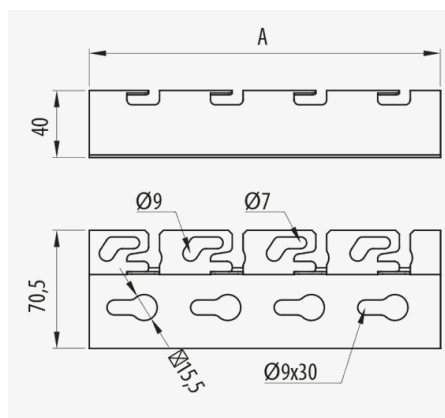


Stand off Bracket Click (Ref: 67060520)

1/8

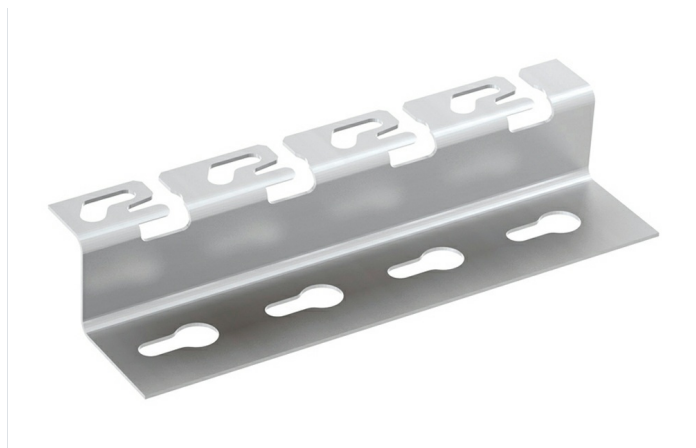

Description

Metal support that allows the installation of Rejiband® and Pemsaband® trays to the floor or wall. Of 40 mm height, Width 100 mm, With INOX protection system, I316L finish. The Click system, for quick connection of wire mesh trays, allows for installation at a height of 40 mm without the need of any fixings. Available in different sizes and Protection Systems.

Advantages

Facilitates handling and vertical installation of Rejiband wire mesh tray by positioning it in the click pin system.

Allows the installation of the tray at a distance of 40 mm from the wall or floor.

Universal mounting system compatible with wire mesh trays by means of the Quick mount Click system without the need of screws or with sheet metal trays by using screws and the configuration of L-shaped M6/M8 holes.

Applications

It is suitable for the installation of Rejiband® and Pemsaband trays and can be mounted vertically on a wall and is an efficient and simple solution as well in false floor installations.

Solutions



FOOD INDUSTRY RENEWABLE ENERGIES



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product data			
ETIM 10		EC000022	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		0,643	
Protection System		INOX	
Finish		Stainless Steel AISI 316L	
Resistance Class		Class 9D	
Flange (mm)		40	
Width (mm)		100	
kg/u		0,121	
u		10	
Material		Acero inoxidable AISI 316L	
SWL (kg)		250	
Working temperature range (°C)		-50 / 150 °C	
Fire resistance		A1 No combustible	

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

