


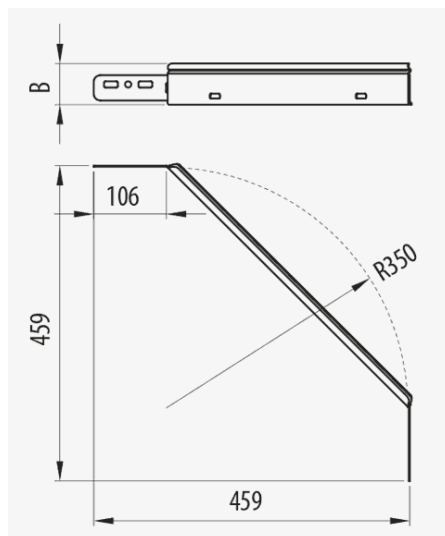

Description

Set of two metallic pieces, one for each side, with safety edge for the creation of tees and joints in installations of Megaband® ladder. Made of steel, with GC Protection System. Available in different sizes.

Advantages

Wide product range for all side heights of Megaband® ladder, 60, 85, 100 and 120 mm.

Facilitates the side exit of a cable.

Allows you to configure a side connection with different angles.

Applications

Suitable for cable management in electrical and telecommunications installations in public buildings, infrastructures and civil works, industrial facilities, tertiary sector. Designed to withstand very high loads.

Solutions



Product data

ETIM 10	EC001006	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	3,16	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 6		
Flange (mm)	60		
kg/u	1,220		

Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic

Product applications

