
DT Derivation



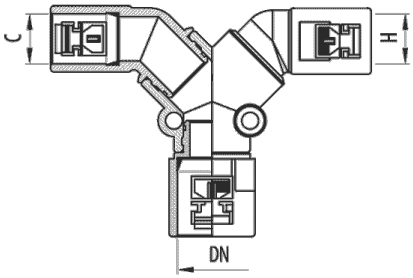

Description

Tee in self-extinguishing polyamide 6 for a branch in Pemsaflex® conduit. Protection rating IP54, IP67 with additional inner seal. The shape of the Pemsaflex® Tee is used to create an angled branch in the cable run, converting one line of conduits into two.

Advantages

Manufactured in polyamide 6. Self-extinguishing, halogen-free according to UNE/EN 60754-2 y UNE/EN 60754-1 and flame-retardant.

Click connection system that allows easy and fast coupling to the conduit.

Suitable for a tee joint of flexible conduits from the Pemsaflex® range. The two branches can be rotated so that the angle can be changed.

Working temperature: -25°C to + 105°C. Degree of protection IP54 according to classification EN60529.

CE conformity to the 2014/35 directive and the IEC 61386 standard.

Applications

Suitable for the connection of Pemsaflex®, LG-PA, ST-PA, RF-PA, RB-PA and RB-PU conduits for the protection of wiring and conductors in electrical installations of machines, tools, industrial equipment, robots , vehicles and special facilities.

Solutions

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

DT Derivation

Main technical characteristics

Colour Grey RAL 7011, Black RAL 9005

DN NW10, NW12, NW17, NW29

10

Polyamide 6

IP54

-25 / 105 °C

LIBRE DE HALÓGENOS,NO PROPAGADOR DE LA LLAMA

ETIM 10
EC002922

Product data

Colour	DN	DN2	Ref	kg/u
Grey RAL 7011	NW10	NW10	31065111	0,028
Grey RAL 7011	NW12	NW10	31065211	0,028
Grey RAL 7011	NW17	NW12	31065422	0,034
Grey RAL 7011	NW17	NW17	31065444	0,041
Grey RAL 7011	NW29	NW23	31065655	0,111
Grey RAL 7011	NW29	NW29	31065666	0,121
Black RAL 9005	NW10	NW10	32065111	0,028
Black RAL 9005	NW12	NW10	32065211	0,028
Black RAL 9005	NW17	NW12	32065422	0,034
Black RAL 9005	NW17	NW17	32065444	0,041
Black RAL 9005	NW29	NW23	32065655	0,111
Black RAL 9005	NW29	NW29	32065666	0,121

Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

DT Derivation

PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."