
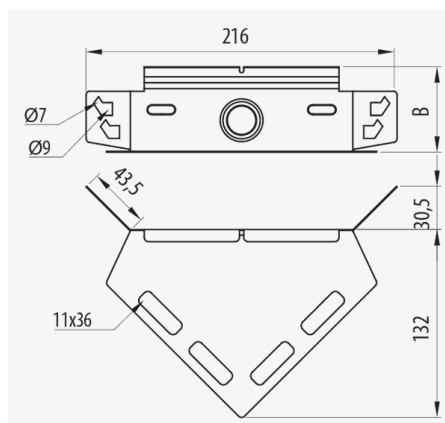


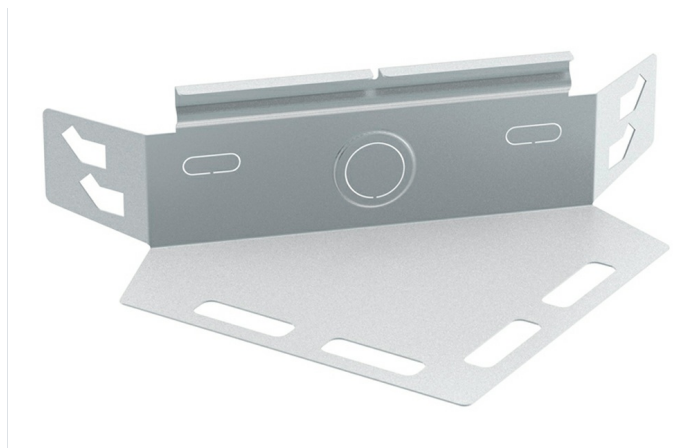

Description

Universal metal corner for Pemsaband® and Inducanal® trays that allow the creation of different accessories, bends, tees, reducers, etc. Of 35 mm height, With GC protection system, HDG finish. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

Advantages

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

Its geometry is adapted to avoid any damage to the cables when making a joint with the rest of the trays.

Applications

Suitable for making various accessories in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

Solutions



Product data			
ETIM 10	EC002400	u	1
Huella de CO2. GWP A1-A3 (kg CO2 eq.)	0,33	Material	Steel with surface coating
Protection System	GC	Working temperature range (°C)	-50 / 150 °C
Finish	HDG, Hot Dip Galvanised	Fire resistance	A1 No combustible
Resistance Class	Class 5		
Flange (mm)	35		
kg/u	0,127		

🔒 Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

🧊 Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

