


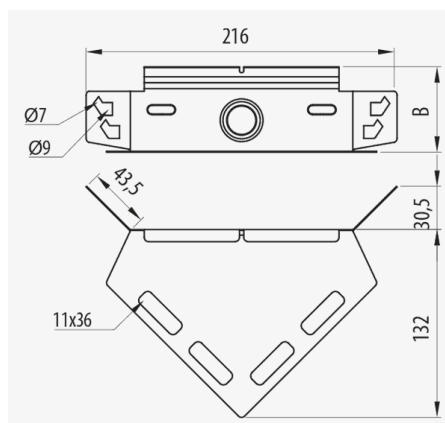

### Description

Universal metal corner for Pemsaband® and Inducanal® trays that allow the creation of different accessories, bends, tees, reducers, etc. Of 60 mm height, With INOX protection system, I304 finish. Quick connection assembly using the Click system without couplers. Made of steel in various sizes and Protection Systems.

### Advantages

Available in all sizes and protection systems: PG, GC and stainless steel AISI304 and AISI316.

The PG protection system is supplied flat for later assembly and provides savings on transportation and storage by reducing its volume.

Assembly by means of the quick-connect click system without the need for couplers.

Its geometry is adapted to avoid any damage to the cables when making a joint with the rest of the trays.

### Applications

Suitable for making various aaccessories in Pemsaband® One perforated and solid tray systems in the Support, management and distribution of Electrical and/or telecommunications cables in public buildings, infrastructures and civil works, tertiary sector and industrial applications.

### Solutions



| Product data                          |  |                          |  |
|---------------------------------------|--|--------------------------|--|
| ETIM 10                               |  | EC002400                 |  |
| Huella de CO2. GWP A1-A3 (kg CO2 eq.) |  | 0,676                    |  |
| Protection System                     |  | INOX                     |  |
| Finish                                |  | Stainless Steel AISI 304 |  |
| Resistance Class                      |  | Class 9C                 |  |
| Flange (mm)                           |  | 60                       |  |
| kg/u                                  |  | 0,127                    |  |
| u                                     |  | 1                        |  |
| Material                              |  | Stainless steel AISI 304 |  |
| Working temperature range (°C)        |  | -50 / 150 °C             |  |
| Fire resistance                       |  | A1 No combustible        |  |

| 🔒 Protection System               |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| 🧊 Insulating materials                    |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications

