
Part Clamp (Ref: 64060060)



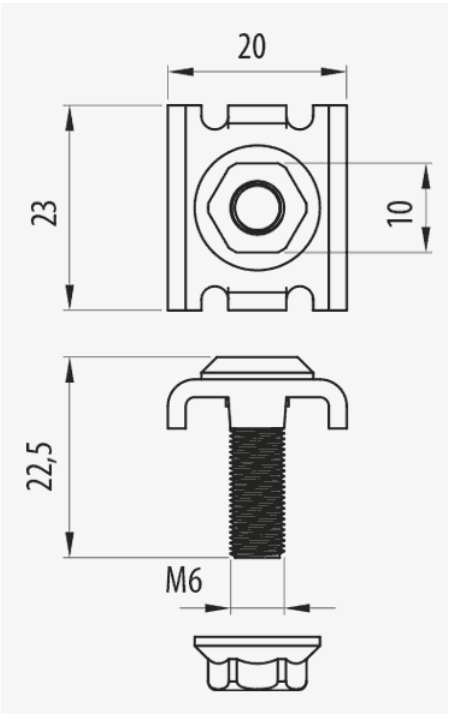

Description

Metal fixing for the attachment of supports or other accessories to Rejiband wire mesh trays. With INOX protection system, I316L finish. It consists of a 20 mm wide plate with a captive M6 screw and nut and is suitable for connection to trays of 35, 60 and 100 mm in height and all widths. Made of steel and available in various Protection Systems.

Advantages

Precise adjustment and maximum resistance.

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

Large saving in time and cost of the installation.

Quick installation thanks to the captive screw.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Applications

Suitable for all Rejiband®tray connections and accessories. It facilitates the installation of Rejiband®wire mesh trays in cable management installations.

Solutions

FOOD INDUSTRY

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Part Clamp (Ref: 64060060)

Product data

ETIM 10	EC001005	**kg/u**	0,019
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		**u**	50
Protection System	INOX	**Material**	Acero inoxidable AISI 316L
Finish	Stainless Steel AISI 316L	**Working temperature range (°C)**	-50 / 150 ºC
Resistance Class	Class 9D	**Fire resistance**	E90 (90 min. 1000°C)
M/PG	M 6		
G (mm)	20		

Ⓢ Protection System

CU - Copper electroplated

PG - Pregalvanised

EZ - Electrogalvanised

BC - Electrogalvanised Bichromate

BK8 - High Resistance Coating

GC - Hot Dip Galvanising

INOX - Stainless Steel

PT - Polyester Paint

AL - Aluminum

LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

PC+ABS - Halogen Free Polycarbonate + ABS

PVC - Polyvinyl Chloride

PP - Halogen Free Polypropylene

PA6 - Halogen Free Polyamide 6

PA12 - Halogen Free Polyamide 12

PU - Polyurethane

PE - Polyethylene

NBR - NBR rubber


PET - Thermoplastic Polyester

TPV - Thermoplastic

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."


Part Clamp (Ref: 64060060)

Product applications

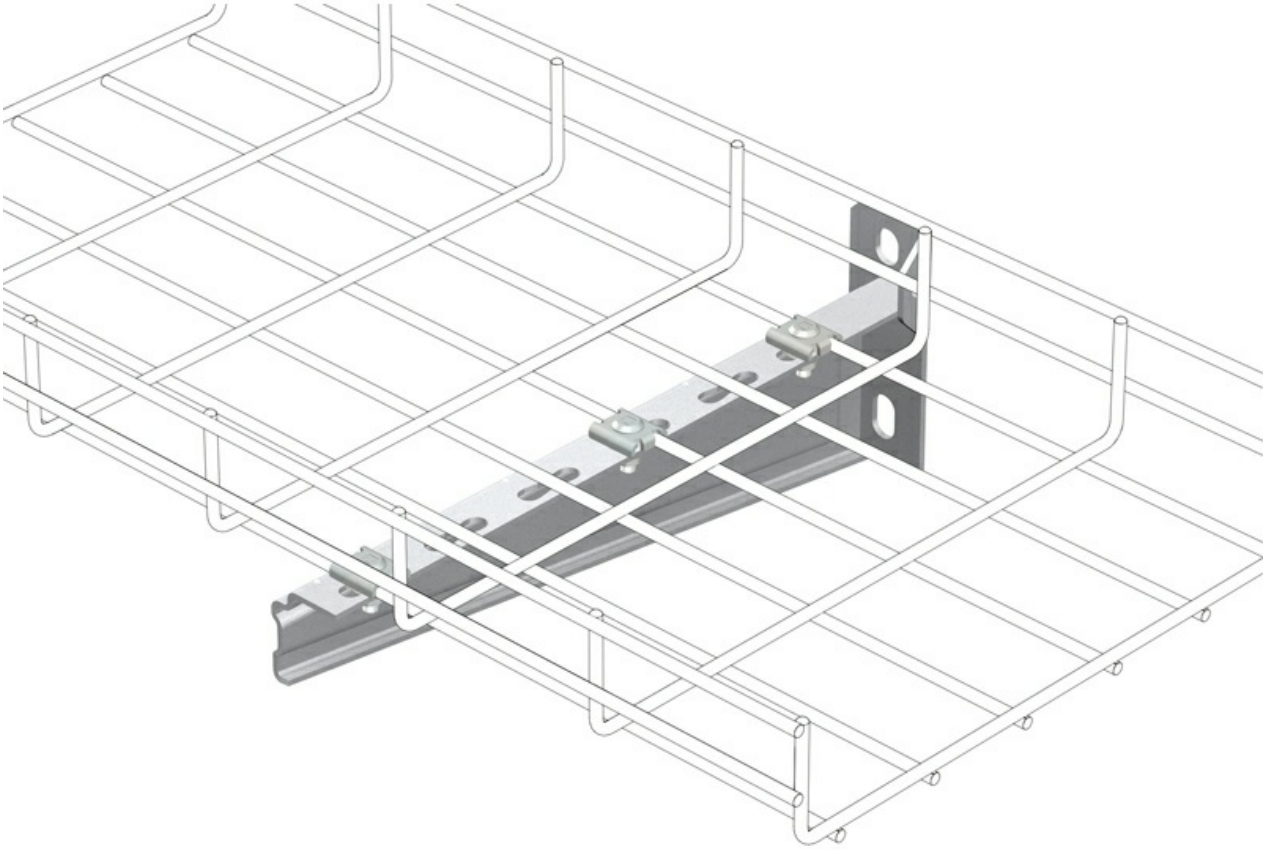

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."

Part Clamp (Ref: 64060060)

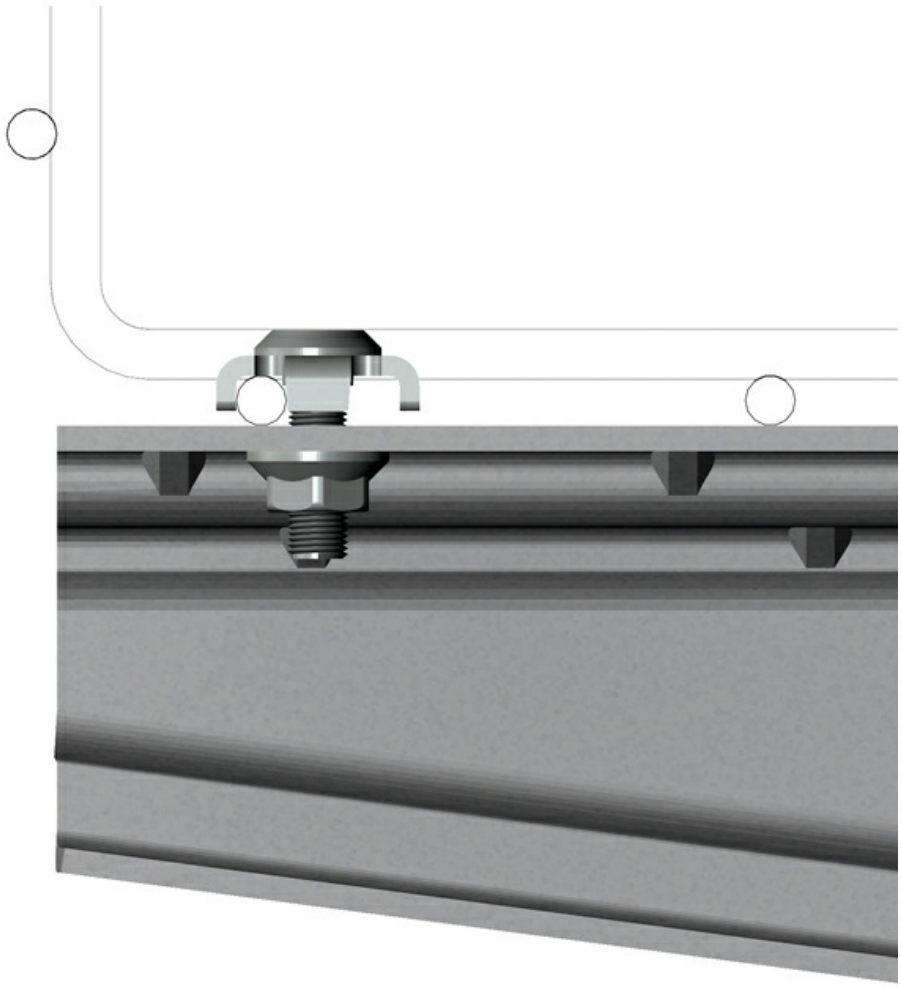

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."