


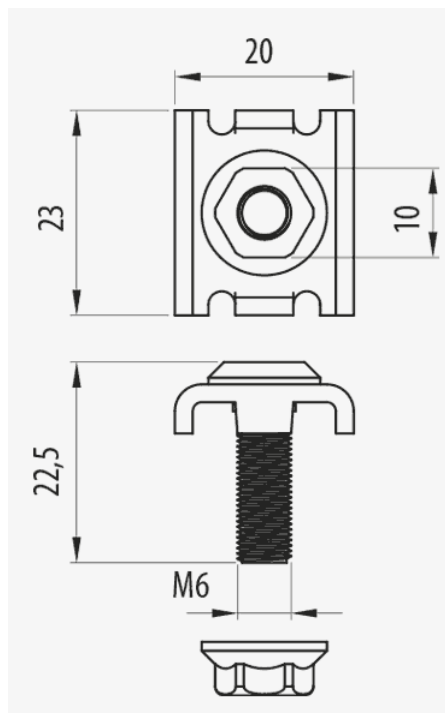

Description

Metal fixing for the attachment of supports or other accessories to Rejiband wire mesh trays. With BK8 protection system, BK8-ZNI finish. It consists of a 20 mm wide plate with a captive M6 screw and nut and is suitable for connection to trays of 35, 60 and 100 mm in height and all widths. Made of steel and available in various Protection Systems.

Advantages

Precise adjustment and maximum resistance.

Available in various protection systems: EZ, BC, GC or high resistance BK8, depending on the type of application.

Large saving in time and cost of the installation.

Quick installation thanks to the captive screw.

E90 fire resistance (90 minutes, 1000°C) according to DIN 4102-12.

Applications

Suitable for all Rejiband tray connections and accessories. It facilitates the installation of Rejiband wire mesh trays in cable management installations.

Solutions



Product data			
ETIM 10		EC001005	
Huella de CO2. GWP A1-A3 (kg CO2 eq.)		u	0,019
Protection System		BK8	
Finish		Zinc Nickel black	
Resistance Class		Class 8	
M/PG		M 6	
G (mm)		20	
		kg/u	0,019
		u	50
		Material	Steel with surface coating
		Working temperature range (°C)	-50 / 150 °C
		Fire resistance	E90 (90 min. 1000°C)

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic

Product applications

